


NAKAMOTO FORESTRY

SKU# NM1686 - Suyaki Interior with Polyurethane BLACK

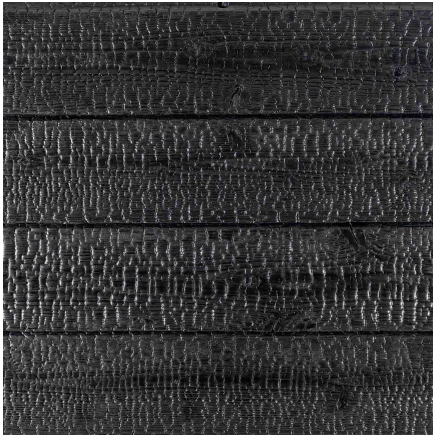

Yakisugi "shou sugi ban". Original unbrushed charred surface, suitable for interior applications. High-traffic, non-toxic, washable surface, with even black color. Delivered ready to install.

Product does not shed soot after installation

Copy and Paste into Appropriate CSI Division

SECTION 06 26 00

CHARRED WOOD SIDING

SKU# NM1686 - The SKU indicates surface and prefinish combination only. Please specify SKU together with dimensional profile when ordering.

Surface & Texture

Suyaki is a surface with small to large crevasse patterns, variable from ¼"-1.5" wide rectangles. The soot layer is approximately 1/16" thick.

Species

Cryptomeria japonica, a monotypic genus in the Cypress family native to Japan. The Japanese name is "Sugi" (as in yakisugi and shou sugi ban), and in the West it is colloquially known as "Japanese Cedar".

Wood Grade

JAS "Small Knot" grade but for Suyaki we select for up to 20 tight knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability and cosmetics are not adversely affected.

Fire Resistance

Suyaki tests to ASTM E84 and UL723 CLASS A Flame Spread and Smoke Developed with or without fire retardant. Species tests to CAN/ULC S102-10 FS of 25 and SDI of 60 without fire retardant. Fire retardant pretreatment not available for interior.

Moisture Content

Air dried then burnt to 11-14% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Installation Details

Overage

Please add a healthy overage ranging 15~20%, as shipping additional material can be very expensive.

Fastening

Tube adhesive and pin nails

Substrate

Per design specification

Installation Layout

Vertical or horizontal, all profiles

Dimensions & Grades Available

Select Grade		
6" Lap	6" S3S	8" S3S

Profile	SF/pc	Length	Reveal	Thickness
6" Lap	5.33	145 11/16"	5 5/16"	9/16"
6" S3S	5.75	145 11/16"	5 11/16"	9/16"
8" S3S	7.75	145 11/16"	7 11/16"	9/16"

Prefinish Specifications

Prefinish Option	Interior Grade 3 Coats Polyurethane
Prefinish Color	Black
Exterior Applications	No
Interior Applications	Yes
Back-Oiling Option	As standard
2nd Coat Oil Option	As standard
Shop-Applied Fire Retardant	Not available
Fire-Retardant-Treated-Wood	Not available


Manufacturer

Nakamoto Forestry North America


Warehouse and Office (By Appt Only)
6400 SE 101st Ave Unit 2C & 3C
Portland Oregon 97266
Tel. (503) 512-6780

Mailing and Billing
4110 SE Hawthorne Blvd. #190
Portland Oregon 97214
Tel. (503) 512-6780


STANDARD SUYAKI 1X6 SHIPLAP DIMENSIONS

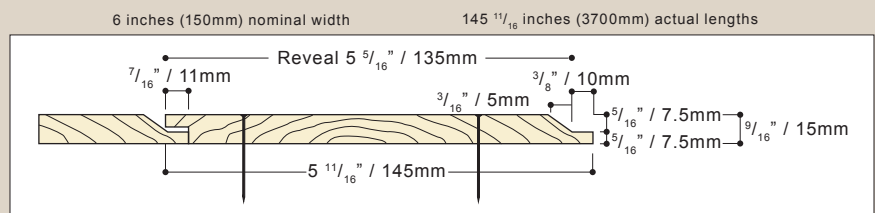

STANDARD SUYAKI 1X6 SQUARE EDGE DIMENSIONS

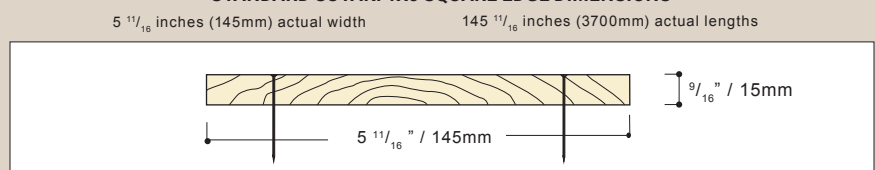

STANDARD SUYAKI 1X8 SQUARE EDGE DIMENSIONS

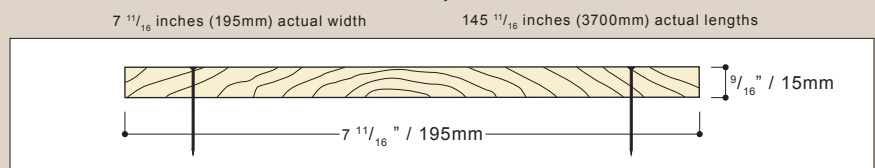

*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

