



**Installation Details**

**Overage**

Please add a healthy overage ranging 15~20%, as shipping additional material can be expensive.

**Fastening (Exterior)**

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

**Substrate (Exterior)**

Rigid furring maximum 16" on-center

**Installation Layout**

Vertical or horizontal, all profiles

**Dimensions & Grades Available**

Select Grade				
Part #	Profile	Length	Reveal	SF/pc
SA2411	6" Lap	145 11/16"	5 5/16"	5.33
SB2411	6" S3S	145 11/16"	5 11/16"	5.75
SE2411	8" Lap	145 11/16"	7 5/16"	7.33
SF2411	8" S3S	145 11/16"	7 11/16"	7.75

**Prefinish Specifications**

Prefinish Option	Exterior Grade 1 Coat Traditional Tung Oil
Prefinish Color	Black
Exterior Application	Yes
Interior Application	No
Back-Oiling Option	Not available
2nd Coat Oil Option	Not available
Shop-Applied Fire Retardant	Available
Pressure Treated Fire Retardant	Not available



**Manufacturer**

**Nakamoto Forestry North America**

**Warehouse and Office** (By Appt Only)  
6400 SE 101st Ave Unit 2C & 3C  
Portland Oregon 97266  
Tel. (503) 512-6780

**Mailing and Billing**  
4110 SE Hawthorne Blvd. #190  
Portland Oregon 97214

**Suyaki Exterior with Tung Oil BLACK (previous SKU# NM2014)**

Yakisugi "shou sugi ban" siding. Original unbrushed charred surface, suitable for exterior applications. Leathery texture with maximum wood and color longevity, and even black color. Delivered ready to install. Exterior grade finish is very delicate and not suitable for high-traffic applications.

**Coated Suyaki is a stable, clean surface that does not noticeably shed soot. Installation and weathering over decades will cause soot layer blemishes, and these are a characteristic of this very traditional product.**

**Copy and Paste into Appropriate CSI Division**

**SECTION 06 26 00 or 07 46 00**

**CHARRED WOOD SIDING**

**Surface & Texture**

Suyaki is a surface with small to large crevasse patterns, variable from ¼"~1.5" wide rectangles. The soot layer is approximately 1/16" thick.

**Species**





*Cryptomeria japonica*, a monotypic genus in the Cypress family native to Japan. The Japanese name is "Sugi" (as in yakisugi and shou sugi ban), and in the West it is colloquially known as "Japanese Cedar".

**Wood Grade**

JAS "Small Knot" grade allows for up to 20 tight knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

**Moisture Content**

Air dried then kiln dried to 11~14% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

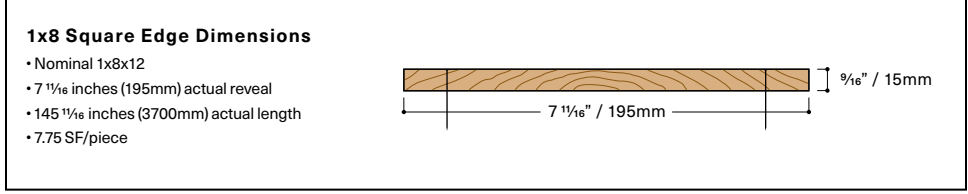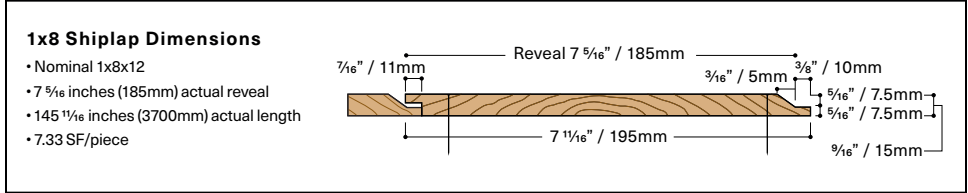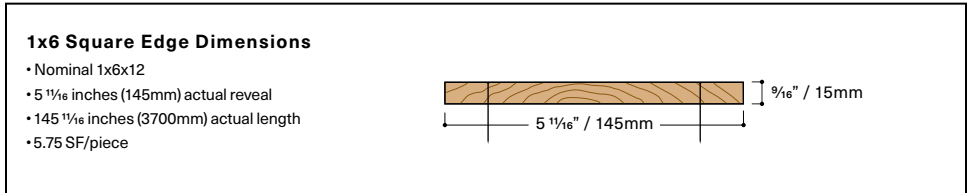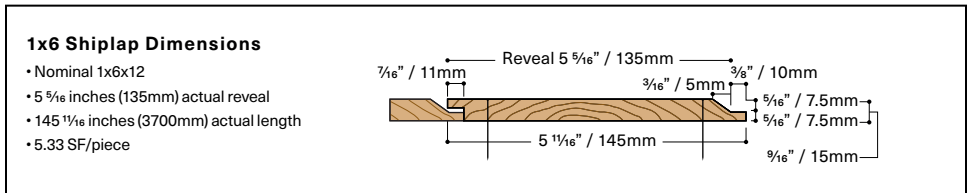

\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

