



## Fastenings - Painted Black

Use these fastenings for a polished, efficient installation, and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- Diagrams below are to size

### Coil Nails

Standard coil siding nails painted black

#### SKU# CNB20

- 6 penny (6d)
- 2" length
- 1800 pcs/box (covers +/- 450 SF of 6" shiplap)

#### SKU# CNB25



- 8 penny (8d)
- 2.5", 2 1/2" length
- 1800 pcs/box (covers +/- 450 SF of 6" shiplap)

#### SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel shank & coil wire to prevent ferrous streaking
- Shank diameter 0.092"
- Head diameter 0.221"
- Annular-ring shank
- 15° pitch
- Diamond point
- 13 gauge

#### COMPATIBLE COIL NAILERS

- Hitachi® NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Bostitch® N64C, N66C, N75C
- Makita® AN611, AN635H
- Grip-Rite® GRTCS250
- Duo-Fast® P275C
- Pallet Pro® 57F

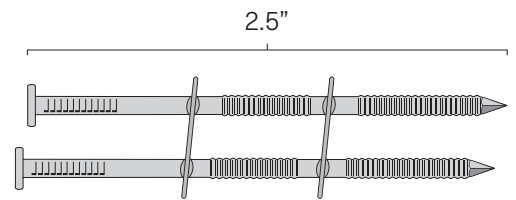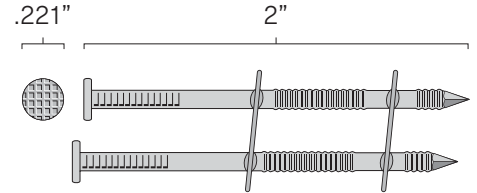

### Hand-Drive Nails


Standard 2" ring-shank hand-drive siding nails painted black

#### SKU# HNB20

- 6 penny (6d)
- 2" length
- 5# box, +/- 975 pcs (covers +/- 220 SF of 6" shiplap)

#### SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"
- Annular-ring shank
- Diamond point
- 13 gauge



### Trim Head Siding Screws

Standard square drive trim head siding screws painted black

#### SKU# SB162



- 1.625", 1 5/8" length
- 4,000 pcs/box (covers +/- 1,000 SF of 6" shiplap)

#### SKU# SB225

- 2.25", 2 1/4" length
- 3,000 pcs/box (covers +/- 750 SF of 6" shiplap)

#### SPECIFICATIONS

- #7 screw
- #1 square drive
- Trim-style head is less noticeable
- Type 316 stainless steel
- Head diameter 0.230", 1/4"
- Coarse threads up approximately 2/3 of shank
- Type 17 point self-tapping



### Supplier

#### Nakamoto Forestry North America

**Warehouse and Office (By Appt Only)**  
7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

**Mailing and Billing**  
4110 SE Hawthorne Blvd. #190  
Portland Oregon 97214





## Aluminum Trim Profiles

Use these trims for a polished appearance, efficient installation and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements. Extruded trims are not flashing and are not a moisture management system. They have a primarily cosmetic function and will not stop all water intrusion into the structure.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- 6063-T5 0.050+/- 0.005" extruded aluminum from recycled sources
- Diagrams below are 1:2 scale

### Low Profile Outside Corner

**SKU# LA58B10**


(Black)

**SKU# LA58P10**

(Primer White)

#### SPECIFICATIONS

- Factory-anodized black or primed white
- 5/8" channel
- 10' length




### Reveal Open Outside Corner

**SKU# RX58B10**

(Black)

#### SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 10' length




### Inside Corner

**SKU# IW34B10**

(Black)

#### SPECIFICATIONS

- Factory-anodized black
- 10' length




### Horizontal Z-Bar

**SKU# Z58B08**

(Black)

#### SPECIFICATIONS

- Factory-anodized black
- 5/8" transition
- 8' length




### Standard J-Bar

**SKU# J58B10**

(Black)

#### SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 10' length



#### Supplier

#### Nakamoto Forestry North America

**Warehouse and Office** (By Appt Only)  
7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

**Mailing and Billing**  
4110 SE Hawthorne Blvd. #190  
Portland Oregon 97214





### Furring and Rainscreen

Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

### 3/8" Corrugated Furring Strips

- Please see install instructions at [rollonrainscreen.com/roll-on-rainscreen-furring-strip](http://rollonrainscreen.com/roll-on-rainscreen-furring-strip)
- 3/8" non-structural corrugated strip with the ability to vent and drain both vertically and horizontally

#### SKU# FS38A


- 3105-type alloy aluminum

#### SKU# FS38S

- 316 grade stainless steel

#### SPECIFICATIONS

- Aluminum furring strips compression tested to 3,000 lbs/ft. (ESi Project No. 69818N)
- 1.5", 1 1/2" wide
- 0.375", 3/8" tall
- We recommend the use of flashing tape or equivalent directly underneath the furring to help seal fasteners
- Pre-drill claddings to avoid blowout as required
- Increases the speed and ease of installation
- Offers cross-ventilation and minimizes waste
- ASTM E84 Class A

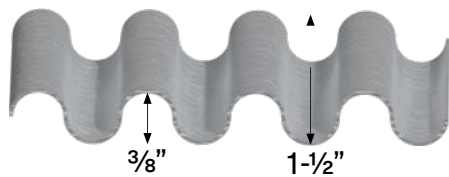

Coiled rainscreen removed from packaging




Vertical siding rainscreen installation example

### Perforated J-Bar

#### SPECIFICATIONS


- Intake or exhaust
- Mill finish aluminum
- 1/8" x 7/32" staggered hole pattern
- 0.032 gauge metal stock
- 10' lengths



### 3/8"

#### SKU# PJ38B10


- Net free area for air flow (per 10'L) = 5.1 in<sup>2</sup>



### 1/2"

#### SKU# PJ12B10


- Net free area for air flow (per 10'L) = 7.1 in<sup>2</sup>



### 3/4"

#### SKU# PJ34B10

- Net free area for air flow (per 10'L) = 10.7 in<sup>2</sup>



#### Supplier

#### Nakamoto Forestry North America

Warehouse and Office (By Appt Only)  
7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

Mailing and Billing  
4110 SE Hawthorne Blvd. #190  
Portland Oregon 97214

