

## Suyaki Polyurethane Black

The original yakisugi “shou sugi ban” paneling, sealed to be user-friendly. The charred, unbrushed, and sealed surface is suitable for interior applications. It has a hard, durable, non-toxic, and washable surface, with even black color. Delivered ready to install.

## Dimensions and Grades

Select Grade				
SKU #	Profile	Length	Reveal	SF/pc
SA2551	6" Lap	145 11/16"***	5 5/16"	5.33
SB2551	6" S3S	145 11/16"	5 11/16"	5.75
SE2551	8" Lap	145 11/16"	7 5/16"	7.33
SF2551	8" S3S	145 11/16"	7 11/16"	7.75

\*\*\* 72" and 120" lengths sometimes available

Copy and Paste into Appropriate CSI Division  
SECTION 06 26 00 or 07 46 00  
CHARRED WOOD PANELING



Scan QR code for pricing, sustainability and other data


## Considerations

- Easily touch up field cuts or damage with water-based polyurethane tinted black.
- Can be ripped, back-planed and glued up for interior door or cabinet applications.
- Non-toxic polyurethane coating.
- Not suitable for any exterior applications or prolonged exposure to moisture.

## Profiles and Dimensions


### 6" Lap - 1x6 Shiplap Charred 3 Sides

- Nominal 1x6x12
- 5 5/16 inches (135mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 5.33 SF/piece

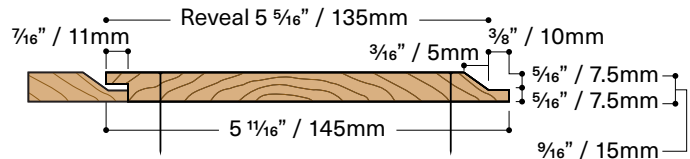


### 6" S3S - 1x6 Square Edge Charred 3 Sides

- Nominal 1x6x12
- 5 11/16 inches (145mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 5.75 SF/piece




### 8" Lap - 1x8 Shiplap Charred 3 Sides

- Nominal 1x8x12
- 7 5/16 inches (185mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 7.33 SF/piece

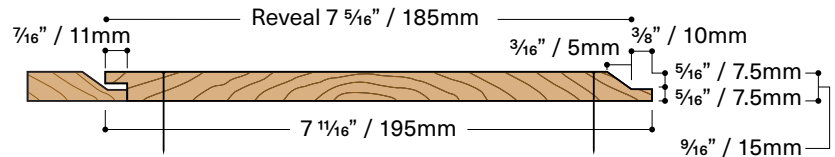

### 8" S3S - 1x8 Square Edge Charred 3 Sides

- Nominal 1x8x12
- 7 11/16 inches (195mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 7.75 SF/piece



\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

## Wood Grade

### Select



JAS "Small Knot" grade allows for up to 20 tight or 10 dead knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

## Prefinish

The non-toxic interior polyurethane coating is clean and hard and protects the wood from dirt and abrasion. It can easily be wiped clean with a moist cloth or touched up with most water-based polyurethanes. It is not suitable for exterior applications or where the siding is consistently exposed to moisture.

### Prefinish Options

Coated 6 sides

### Prefinish Color

Black

### Exterior Application

No

### Interior Application

Yes

### Pressure-Treated Fire Retardant

Not available

### Field Cuts

Coat all field cuts and rips with touch up oil

## Species

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi" (as in yakisugi and "shou sugi ban"). In English it is colloquially called Japanese cedar.

## Manufacturer

### Nakamoto Forestry North America

#### By Appointment Only

7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780



## Installation Details

**For installation instructions see:**  
[nakamotoforestry.com/installation](http://nakamotoforestry.com/installation)

### Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

### Fastening (Interior)

Tube adhesive and pin nails

### Substrate (Interior)

Per design specifications

### Installation Layout

Vertical or horizontal, all profiles

## Fire Resistance

ASTM E-84 Class C.

## Moisture Content

Air dried then kiln dried to 11-14% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.