

**Suyaki Tung Oil Black**

The original yakisugi “shou sugi ban” siding, sealed to be user-friendly. The charred, unbrushed, and oiled surface is suitable for exterior applications. It has a leathery texture with maximum wood and color longevity, and an even black color. This product is delicate and will blemish. It is not suitable for high-traffic applications. Delivered ready to install.

**Dimensions and Grades**

Select Grade				
SKU #	Profile	Length	Reveal	SF/pc
SA2411	6" Lap	145 11/16"***	5 5/16"	5.33
SB2411	6" S3S	145 11/16"	5 11/16"	5.75
SE2411	8" Lap	145 11/16"	7 5/16"	7.33
SF2411	8" S3S	145 11/16"	7 11/16"	7.75

\*\* 72" and 120" lengths sometimes available

Copy and Paste into Appropriate CSI Division  
SECTION 06 26 00 or 07 46 00  
CHARRED WOOD SIDING



Scan QR code for pricing, sustainability and other data


**Considerations**

- Handle with extreme care.
- User-friendly material with a leathery surface that will patina slowly over time.
- Blemishes and soot erosion will develop over time and are the nature of this very traditional material.
- Easy touch up if scratched or scuffed.

**Profiles and Dimensions**


**6" Lap - 1x6 Shiplap Charred 3 Sides**

- Nominal 1x6x12
- 5 5/16 inches (135mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 5.33 SF/piece

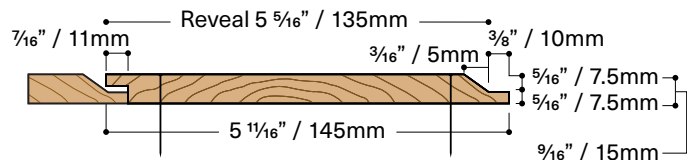


**6" S3S - 1x6 Square Edge Charred 3 Sides**

- Nominal 1x6x12
- 5 11/16 inches (145mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 5.75 SF/piece




**8" Lap - 1x8 Shiplap Charred 3 Sides**

- Nominal 1x8x12
- 7 5/16 inches (185mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 7.33 SF/piece

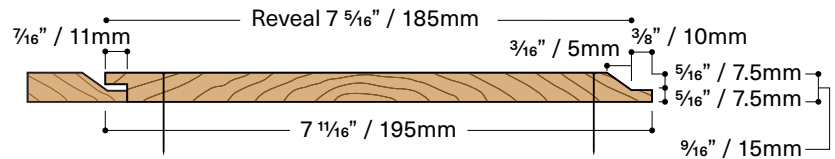

**8" S3S - 1x8 Square Edge Charred 3 Sides**

- Nominal 1x8x12
- 7 11/16 inches (195mm) actual reveal
- 145 11/16 inches (3700mm) actual length
- 7.75 SF/piece



\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

## Wood Grade

### Select



JAS "Small Knot" grade allows for up to 20 tight or 10 dead knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

## Prefinish

Our unique tung oil blend was custom formulated specifically for exterior Suyaki®. This oil stain penetrates into and stabilizes the delicate soot layer, making it easier to handle during installation. The black pigment makes the siding very consistent in tone. The leathery texture will blemish and weather over time, and can easily be touched up.

### Prefinish Options

Coated face only

### Prefinish Color

Black

### Exterior Application

Yes

### Interior Application

No

### Pressure-Treated Fire Retardant

Not available

### Field Cuts

Coat all field cuts and rips with touch up oil

## Installation Details

**For installation instructions see:**  
[nakamotoforestry.com/installation](http://nakamotoforestry.com/installation)

### Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

### Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

### Substrate (Exterior)

Rigid furring maximum 16" on-center

### Installation Layout

Vertical or horizontal, all profiles

## Fire Resistance

ASTM E-84 Class B. Currently listed for Calfire SFM Chapter 7 WUI zone exterior siding and soffit applications under AWC 2041-0001/0005/0008 and undergoing certification testing for direct SFM listing.

## Moisture Content

Air dried then kiln dried to 11-14% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

## Species

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

## Manufacturer

**Nakamoto Forestry North America**

**By Appointment Only**

7320 NE 55th Ave.  
 Portland Oregon 97218  
 Tel. (503) 512-6780

