

Fastenings - Painted Black

Use these fastenings for a polished, efficient installation, and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- Diagrams below are to size

Coil Nails

Standard coil siding nails painted black

SKU# CNB20

- 6 penny (6d)
- 2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap

SKU# CNB25



- 8 penny (8d)
- 2.5", 2 1/2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap

SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel shank & coil wire to prevent ferrous streaking
- Shank diameter 0.092"
- Head diameter 0.221"
- Annular-ring shank
- 15° pitch
- Diamond point

COMPATIBLE COIL NAILERS

- Metabo® (Hitachi®) NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Bostitch® N64C, N66C, N75C
- Makita® AN611, AN635H
- Grip-Rite® GRTCS250
- Duo-Fast® P275C • Pallet Pro® 57F

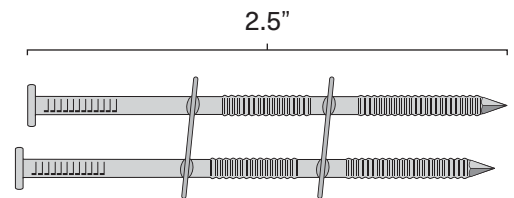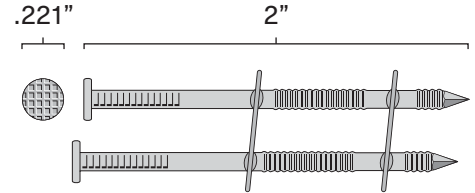

Hand-Drive Nails


Standard 2" ring-shank hand-drive siding nails painted black

SKU# HNB20

- 6 penny (6d)
- 2" length
- 5# box, +/- 975 pcs
- Each box covers +/- 220 SF of 6" shiplap

SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"
- Annular-ring shank
- Diamond point
- 13 gauge



Trim Head Siding Screws

Standard star drive trim head siding screws painted black

SKU# SB162



- 1.625", 1 5/8" length
- 4,000 pcs/box
- Each box covers +/- 1,000 SF of 6" shiplap

SKU# SB225

- 2.25", 2 1/4" length
- 3,000 pcs/box
- Each box covers +/- 750 SF of 6" shiplap

SPECIFICATIONS

- #7 screw
- T15 star drive
- Trim-style head is less noticeable
- Type 316 stainless steel
- Head diameter 0.230", 1/4"
- Coarse threads up approximately 2/3 of shank
- Type 17 point self-tapping



Supplier

Nakamoto Forestry North America

Warehouse and Office (By Appt Only)

7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Aluminum Trim Profiles

Use these trims for a polished appearance, efficient installation and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements. Extruded trims are not flashing and are not part of a moisture management system. They have a primarily cosmetic function and will not stop all water intrusion into the structure.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- 6063-T5 0.050+/- 0.005" extruded aluminum from recycled sources
- Diagrams below are 1:2 scale

Low Profile Outside Corner

Black

SKU# LA58B10 10' length


SKU# LA58B08 8' length

Primer White

SKU# LA58P10 10' length

SPECIFICATIONS

- Factory-anodized black or primed white
- 5/8" channel
- 8' and 10' lengths



Reveal Open Outside Corner


Black

SKU# RX58B10 10' length

SKU# RX58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths



Inside Corner


Black

SKU# IW34B10 10' length

SKU# IW34B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 7/8" channel
- 8' and 10' lengths




Horizontal Z-Bar

Black

SKU# Z58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" transition
- 8' lengths



Standard J-Bar


Black

SKU# J58B10 10' length

SKU# J58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths



Supplier - Nakamoto Forestry North America

Warehouse and Office (By Appt Only)

7320 NE 55th Ave.

Portland Oregon 97218

Tel. (503) 512-6780

Furring and Rainscreen

Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area. Sold by the roll. Tallied by the lineal foot.

3/8" Corrugated Furring Strips


- Sold by the roll. Tallied by the lineal foot.
- 3/8" non-structural corrugated strip with the ability to vent and drain both vertically and horizontally
- Please see install instructions at <https://albuildsystems.com/roll-on-rainscreen/>

SKU# FS38A

- 3105-type alloy aluminum

SKU# FS38S

- 316 grade stainless steel

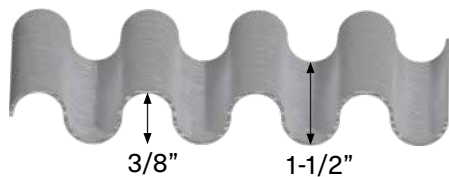

SPECIFICATIONS

- Aluminum furring strips compression tested to 3,000 lbs/ft. (ESi Project No. 69818N)
- 1.5", 1 1/2" wide
- 0.375", 3/8" tall
- We recommend the use of flashing tape or equivalent directly underneath the furring to help seal fasteners
- Pre-drill claddings to avoid blowout as required
- Increases the speed and ease of installation
- Offers cross-ventilation and minimizes waste
- ASTM E84 Class A



Coiled rainscreen removed from packaging




Vertical siding rainscreen installation example

Perforated J-Bar

- Diagrams below are 1:2 scale

SPECIFICATIONS

- Intake or exhaust
- Mill finish aluminum
- 1/8" x 7/32" staggered hole pattern
- 0.032 gauge metal stock
- 8' and 10' lengths




3/8"

SKU# PJ38B10 10' length

SKU# PJ38B08 8' length

- Net free area for air flow 0.51 in² per LF




1/2"

SKU# PJ12B10 10' length

SKU# PJ12B08 8' length

- Net free area for air flow 0.71 in² per LF




3/4"

SKU# PJ34B10 10' length

SKU# PJ34B08 8' length

- Net free area for air flow 1.07 in² per LF



Supplier

Nakamoto Forestry North America

Warehouse and Office (By Appt Only)

7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780