

**Gendai Unoil**

Yakisugi “shou sugi ban” siding and paneling. The top layer of soot has been gently brushed off, leaving a smooth, consistent, and dark surface. Uncoated Gendai is a quintessential Japanese wabi-sabi siding material that quickly develops a rich patina from exposure. It is naturally weather- and fire-resistant due to being heat-treated. This is a great option for owners who appreciate the organic, natural beauty of wood and want to savor it as a living, changing finish. Can be coated with an oil finish at installation or any time in future. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division  
SECTION 06 26 00 or 07 46 00  
CHARRED WOOD [SIDING] [&] [PANELING]



Scan QR code for pricing, sustainability and other data

| Profile                          | Grade  |               |                      |                       |
|----------------------------------|--------|---------------|----------------------|-----------------------|
|                                  | Select | Premium Clear | Clear Vertical Grain | Select+Fire Retardant |
| 1 x 6 x 12 Shiplap               | GA2000 | GD2000        | –                    | XA2000                |
| 1 x 6 x 12 S3S Square Edge       | GB2000 | –             | –                    | –                     |
| 1 x 6 x 12 S4S Square Edge       | GC2000 | –             | –                    | –                     |
| 1 x 8 x 12 Shiplap               | GE2000 | –             | –                    | –                     |
| 1 x 8 x 12 S3S Square Edge       | GF2000 | –             | –                    | –                     |
| 1 x 2 x 12 S3S Square Edge       | –      | –             | GG2000               | –                     |
| 5/4 x 2-1/2 x 12 S3S Square Edge | –      | GH2000        | –                    | –                     |
| 5/4 x 2-1/2 x 12 S4S Square Edge | –      | GI2000        | –                    | –                     |
| 5/4 x 5 x 12 S3S Square Edge     | –      | GJ2000        | –                    | –                     |
| 5/4 x 5 x 12 S4S Square Edge     | –      | GK2000        | –                    | –                     |
| 5/4 x 8 x 12 S3S Square Edge     | GL2000 | –             | –                    | –                     |

**Considerations**

- Our most dramatic sabi patina product.
- Every project will weather differently due to unique microclimates.
- Traditionally used on interior ceilings as an air purifier.
- Soot residue, caking, and erosion, especially along board edges, is unavoidable and is the nature of this product.
- Can be coated with an oil finish at installation or any time in future.

**Patina Scale**



The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

**Wood Grade**

**Select**



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

**Premium Clear**



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.




**Profiles and Dimensions**

(diagrams below are 20% actual size)


**1 x 6 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece

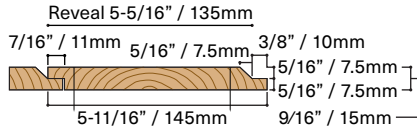


**1 x 6 x 12 S3S & S4S Square Edge**

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece




**1 x 8 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

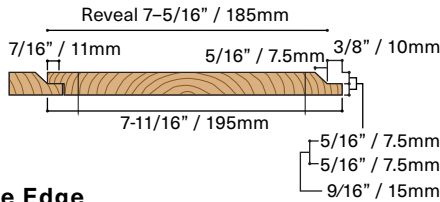


**1 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




**1 x 2 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.77 SF/piece




**5/4 x 2-1/2 x 12 S3S & S4S Square Edge**

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.4 SF/piece




**5/4 x 5 x 12 S3S & S4S Square Edge**

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.81 SF/piece



**5/4 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.78 SF/piece



\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

**Prefinish**

The species, millwork and heat treatment process make yakisugi "shou sugi ban" naturally resistant to pests, moisture, and fire. Coatings and stains are technically unnecessary for this product category. Leaving the wood unoiled allows it to weather naturally, according to the local climate. Unoiled siding can always be oiled in the future to add color or consistency.

**Prefinish Options**

N/A

**Prefinish Color**

N/A

**Pressure-Treated Fire Retardant**

Available Select grade 1x6x12 shiplap only

**Field Cuts**

Coat all field cuts and rips with touch up oil

**Species**

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

**Manufacturer**

**Nakamoto Forestry North America**

Warehouse & Office (By Appt Only)

7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

**Installation Details**

**For installation instructions see:**

[nakamotoforestry.com/installation](http://nakamotoforestry.com/installation)

**Overage**

Please add a healthy overage ranging 15-25%, as shipping additional material can be expensive

**Fastening (Exterior)**

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

**Substrate (Exterior)**

Rigid furring maximum 16" on-center

**Fastening (Interior)**

Tube adhesive and pin nails

**Substrate (Interior)**

Per design specifications

**Installation Layout**

Vertical or horizontal, all profiles

**Fire Resistance**

ASTM E-84 Class B without fire retardant, Class A with fire retardant (SKU# XA2000).

