

Suyaki Polyurethane Black

The original yakisugi “shou sugi ban” paneling, sealed to be user-friendly. The charred, unbrushed, and sealed surface is suitable for interior applications. It has a hard, durable, non-toxic, and washable surface, with even black color. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD PANELING




Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Clear Vertical Grain
1 x 6 x 12 Shiplap	SA2551	–	–
1 x 6 x 12 S3S Square Edge	SB2551	–	–
1 x 8 x 12 Shiplap	SE2551	–	–
1 x 8 x 12 S3S Square Edge	SF2551	–	–
1 x 2 x 12 S3S Square Edge	–	–	SG2551
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2551	–
5/4 x 5 x 12 S3S Square Edge	–	SJ2551	–
5/4 x 8 x 12 S3S Square Edge	SL2551	–	–

Considerations

- Easily touch up field cuts or damage with water-based polyurethane tinted black.
- Can be ripped, back-planed and glued up for interior door or cabinet applications.
- Non-toxic polyurethane coating.
- Not suitable for any exterior applications or prolonged exposure to moisture.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Wood Grade Select




JAS "Small Knot" grade allows for up to 20 tight or 10 dead knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)


1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece

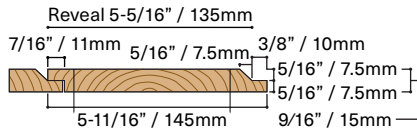


1 x 6 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece




1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

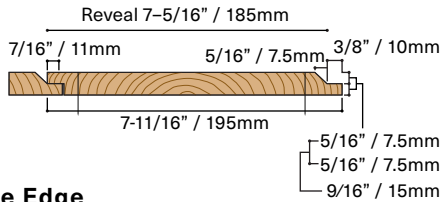


1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.77 SF/piece




5/4 x 2-1/2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 2.4 SF/piece




5/4 x 5 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 4.81 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.78 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The non-toxic interior polyurethane coating is clean and hard and protects the wood from dirt and abrasion. It can easily be wiped clean with a moist cloth or touched up with most water-based polyurethanes. It is not suitable for exterior applications or where the siding is consistently exposed to moisture.

Prefinish Options

Coated 6 sides

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not Available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)

7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Installation Details

For installation instructions see:

nakamotoforestry.com/installation

Overage

Please add a healthy overage ranging 15-25%, as shipping additional material can be expensive

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E-84 Class C

