

## Suyaki Tung Oil Black

The original yakisugi “shou sugi ban” siding, sealed to be user-friendly. The charred, unbrushed, and oiled surface is suitable for exterior applications. It has a leathery texture with maximum wood and color longevity, and an even black color. This product is delicate and will blemish. It is not suitable for high-traffic applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division  
SECTION 06 26 00 or 07 46 00  
CHARRED WOOD SIDING



Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Clear Vertical Grain
1 x 6 x 12 Shiplap	SA2411	–	–
1 x 6 x 12 S3S Square Edge	SB2411	–	–
1 x 8 x 12 Shiplap	SE2411	–	–
1 x 8 x 12 S3S Square Edge	SF2411	–	–
1 x 2 x 12 S3S Square Edge	–	–	SG2411
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2411	–
5/4 x 5 x 12 S3S Square Edge	–	SJ2411	–
5/4 x 8 x 12 S3S Square Edge	SL2411	–	–

### Considerations


- Handle with extreme care.
- User-friendly material with a leathery surface that will patina slowly over time.
- Blemishes and soot erosion will develop over time and are the nature of this very traditional material.
- Easy touch up if scratched or scuffed.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

### Patina Scale



The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

### Wood Grade Select



JAS "Small Knot" grade allows for up to 20 tight or 10 dead knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.




**Profiles and Dimensions**

(diagrams below are 20% actual size)


**1 x 6 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece

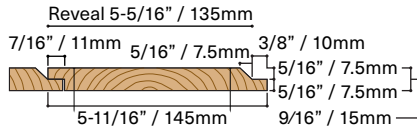


**1 x 6 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece




**1 x 8 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

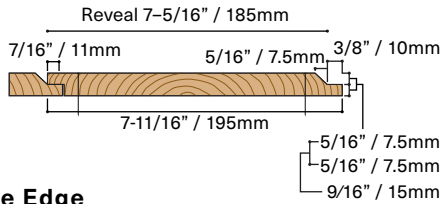


**1 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




**1 x 2 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.77 SF/piece




**5/4 x 2-1/2 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 2.4 SF/piece




**5/4 x 5 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 4.81 SF/piece



**5/4 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.78 SF/piece



\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

**Prefinish**

Our unique tung oil blend was custom formulated specifically for exterior Suyaki®. This oil stain penetrates into and stabilizes the delicate soot layer, making it easier to handle during installation. The black pigment makes the siding very consistent in tone. The leathery texture will blemish and weather over time, and can easily be touched up.

**Prefinish Options**

Coated face only

**Prefinish Color**

Black

**Pressure-Treated Fire Retardant**

Not Available

**Field Cuts**

Coat all field cuts and rips with touch up oil

**Species**

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

**Manufacturer**

**Nakamoto Forestry North America**

Warehouse & Office (By Appt Only)

7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

**Installation Details**

**For installation instructions see:**

[nakamotoforestry.com/installation](http://nakamotoforestry.com/installation)

**Overage**

Please add a healthy overage ranging 15-25%, as shipping additional material can be expensive

**Fastening (Exterior)**

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

**Substrate (Exterior)**

Rigid furring maximum 16" on-center

**Installation Layout**

Vertical or horizontal, all profiles

**Fire Resistance**

ASTM E-84 Class B

