

## Suyaki Unoiled

The original yakisugi “shou sugi ban” siding. Charred, unbrushed, and unoiled Suyaki is the visual and cultural benchmark standard for the entire yakisugi product category. Certified ASTM E84 Class A Flame Spread. This product is very delicate and not suitable for high-traffic applications. It will blemish, is difficult to handle, and is not for the faint of heart. This is a great option for owners who appreciate the organic, natural beauty of wood and want to savor it as a living, evolving finish. Delivered ready to install.

Copy and Paste into Appropriate CSI Division  
SECTION 06 26 00 or 07 46 00  
CHARRED WOOD SIDING



Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Clear Vertical Grain
1 x 6 x 12 Shiplap	SA2000	–	–
1 x 6 x 12 S3S Square Edge	SB2000	–	–
1 x 8 x 12 Shiplap	SE2000	–	–
1 x 8 x 12 S3S Square Edge	SF2000	–	–
1 x 2 x 12 S3S Square Edge	–	–	SG2000
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2000	–
5/4 x 5 x 12 S3S Square Edge	–	SJ2000	–
5/4 x 8 x 12 S3S Square Edge	SL2000	–	–

### Considerations


- Handle with extreme care.
- Installers and the jobsite will get covered in soot during installation.
- Our most pure, all-in yakisugi option.
- Arguably the most beautiful black color there is in architecture.
- The most fire-resistant natural wood siding that we are aware of.
- Blemishes and soot erosion will develop over time and are the nature of this very traditional material.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.

### Patina Scale



The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

### Wood Grade Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.




**Profiles and Dimensions**

(diagrams below are 20% actual size)


**1 x 6 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece

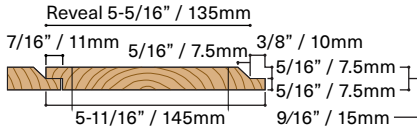


**1 x 6 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece




**1 x 8 x 12 Shiplap**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

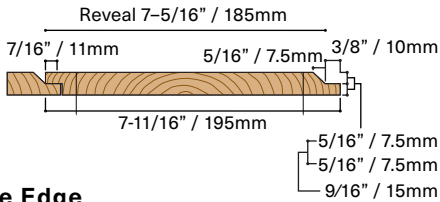


**1 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




**1 x 2 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.77 SF/piece




**5/4 x 2-1/2 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 2.4 SF/piece




**5/4 x 5 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 4.81 SF/piece



**5/4 x 8 x 12 S3S Square Edge**

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.78 SF/piece



\*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

**Prefinish**

The species, millwork, and heat treatment process make yakisugi "shou sugi ban" naturally resistant to pests, moisture, and fire. Coatings and stains are technically unnecessary for this product category. Leaving the wood unoiled allows it to weather naturally, according to the local climate. Unoiled siding can always be oiled in the future to add color or consistency.

**Prefinish Options**

N/A

**Prefinish Color**

N/A

**Pressure-Treated Fire Retardant**

Not Available

**Field Cuts**

Coat all field cuts and rips with touch up oil

**Species**

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

**Manufacturer**

**Nakamoto Forestry North America**

Warehouse & Office (By Appt Only)

7320 NE 55th Ave.  
Portland Oregon 97218  
Tel. (503) 512-6780

**Installation Details**

**For installation instructions see:**

[nakamotoforestry.com/installation](http://nakamotoforestry.com/installation)

**Overage**

Please add a healthy overage ranging 15-25%, as shipping additional material can be expensive

**Fastening (Exterior)**

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

**Substrate (Exterior)**

Rigid furring maximum 16" on-center

**Installation Layout**

Vertical or horizontal, all profiles

**Fire Resistance**

ASTM E-84 Class A

