

Fastenings - Painted Black

Use these fastenings for a polished, efficient installation, and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

Coil Nails

Standard coil siding nails painted black

SKU# CNB20

- 6 penny (6d)
- 2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap

SKU# CNB25

- 8 penny (8d)
- 2.5", 2 1/2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap


SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel shank & coil wire to prevent ferrous streaking
- Shank diameter 0.092"
- Head diameter 0.221"
- Annular-ring shank
- 15° pitch
- Diamond point

COMPATIBLE COIL NAILERS

- Metabo® (Hitachi®) NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Bostitch® N64C, N66C, N75C
- Makita® AN611, AN635H
- Grip-Rite® GRTCS250
- Duo-Fast® P275C • Pallet Pro® 57F

• Diagrams below are to size

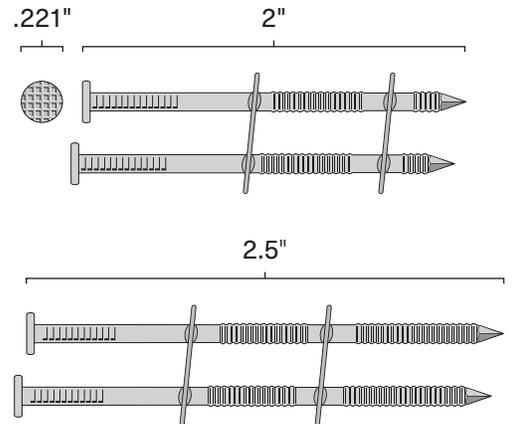

Hand-Drive Nails


Standard 2" ring-shank hand-drive siding nails painted black

SKU# HNB20

- 6 penny (6d)
- 2" length
- 5# box, +/- 975 pcs
- Each box covers +/- 220 SF of 6" shiplap

SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"
- Annular-ring shank
- Diamond point
- 13 gauge

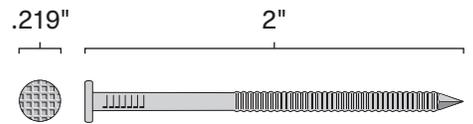

Trim Head Siding Screws

Standard star drive trim head siding screws painted black

SKU# SB162

- 1.625", 1 5/8" length
- 4,000 pcs/box
- Each box covers +/- 1,000 SF of 6" shiplap

SKU# SB225


- 2.25", 2 1/4" length
- 3,000 pcs/box
- Each box covers +/- 750 SF of 6" shiplap

SKU# SB300

- 3" length
- 2,000 pcs/box
- Each box covers +/- 500 SF of 6" shiplap

SPECIFICATIONS

- #7 screw
- T15 star drive
- Trim-style head is less noticeable
- Type 316 stainless steel
- Head diameter 0.230", 1/4"
- Coarse threads up approximately 2/3 of shank
- Type 17 point self-tapping

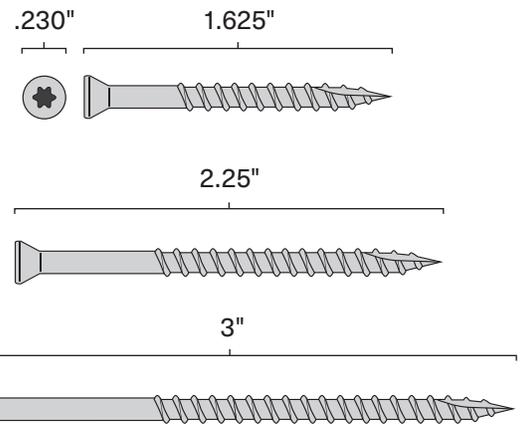

Aluminum Trim Profiles

Use these trims for a polished appearance, efficient installation and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements. Extruded trims are not flashing and are not part of a moisture management system. They have a primarily cosmetic function and will not stop all water intrusion into the structure.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- 6063-T5 0.050+/- 0.005" extruded aluminum from recycled sources
- Diagrams below are 1:2 scale


Low Profile Outside Corner

Black
SKU# LA58B10 10' length
SKU# LA58B08 8' length

Primer White
SKU# LA58P10 10' length

SPECIFICATIONS

- Factory-anodized black or primed white
- 5/8" channel
- 8' and 10' lengths




Reveal Open Outside Corner

Black
SKU# RX58B10 10' length
SKU# RX58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths




Inside Corner

Black
SKU# IW34B10 10' length
SKU# IW34B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 7/8" channel
- 8' and 10' lengths




Horizontal Z-Bar

Black
SKU# Z58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" transition
- 8' lengths




Standard J-Bar

Black
SKU# J58B10 10' length
SKU# J58B08 8' length

SPECIFICATIONS

- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths




Perforated J-Bar

• Diagrams below are 1:2 scale

SPECIFICATIONS

- Intake or exhaust
- Mill finish aluminum
- 1/8" x 7/32" staggered hole pattern
- 0.032 gauge metal stock
- 8' and 10' lengths




3/8"

SKU# PJ38B10 10' length

SKU# PJ38B08 8' length

• Net free area for air flow 0.51 in² per LF




1/2"

SKU# PJ12B10 10' length

SKU# PJ12B08 8' length

• Net free area for air flow 0.71 in² per LF



3/4"

SKU# PJ34B10 10' length

SKU# PJ34B08 8' length

• Net free area for air flow 1.07 in² per LF

