

Gendai with Warranted Acrylic Coating Black

Yakisugi “shou sugi ban” siding and paneling. The top layer of soot has been gently brushed off, leaving a smooth and consistent surface. A warranted acrylic coating is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]



**Scan QR code for
pricing, sustainability
and other data**

Profile	Grade		
	Select	Premium Clear	Select + Fire Retardant
1 x 6 x 12 Shiplap	GA2751	GD2751	XA2751
1 x 6 x 12 S3S Square Edge	GB2751	–	
1 x 6 x 12 S4S Square Edge	GC2751	–	
1 x 8 x 12 Shiplap	GE2751	–	
1 x 8 x 12 S3S Square Edge	GF2751	–	
1 x 2 x 12 S3S Square Edge	–	GG2751	
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2751	
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2751	
5/4 x 5 x 12 S3S Square Edge	–	GJ2751	
5/4 x 5 x 12 S4S Square Edge	–	GK2751	
5/4 x 8 x 12 S3S Square Edge	GL2751	–	

Considerations

- Great option for institutional or other projects requiring the best coating performance.
- Architectural grade coating field tested for generations.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale



The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear




Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)


1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16"
(3700mm) length
- 5.33 SF/piece




1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16"
(3700mm) length
- 5.75 SF/piece




1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16"
(3700mm) length
- 7.33 SF/piece

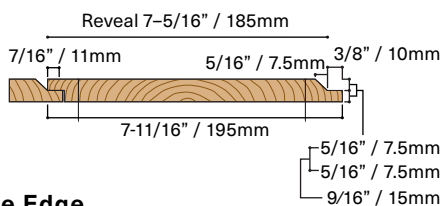


1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16"
(3700mm) length
- 7.75 SF/piece




1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16"
(3700mm) length
- 1.75 SF/piece




5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16"
(3700mm) length
- 2.33 SF/piece




5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16"
(3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16"
(3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Acrylic latex coatings offer the best color durability on the market by being high adhesion, high build and solid color. This finish is designed to withstand challenging exterior environments, has been tested in the field for over 60 years and carries a limited manufacturer warranty of 25 years.

Prefinish Options

Coated on 4 sides

Prefinish Color

Black

Pressure-Treated Fire Retardant

Available Select grade 1x6x12 shiplap only

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Warranty

Lumber products carry a limited 5 year warranty from major millwork defects. The acrylic coating option carries a 25-year limited manufacturer warranty. Other coatings, treatments, accessories, and special offers are excluded. Warranty remedies are not available if requirements are not followed. Please reference our Terms and Conditions for details.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)

7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

