## Gendai Linseed Brown

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

**Copy and Paste into Appropriate CSI Division**
**SECTION 06 26 00 or 07 46 00**
**CHARRED WOOD SIDING**

**Scan QR code for pricing, sustainability and other data**

| Profile | Grade | |
|---|---|---|
| | Select | Premium Clear |
| 1 x 6 x 12 Shiplap | GA2134 | GD2134 |
| 1 x 6 x 12 S3S Square Edge | GB2134 | – |
| 1 x 6 x 12 S4S Square Edge | GC2134 | – |
| 1 x 8 x 12 Shiplap | GE2134 | – |
| 1 x 8 x 12 S3S Square Edge | GF2134 | – |
| 1 x 2 x 12 S3S Square Edge | – | GG2134 |
| 5/4 x 2-1/2 x 12 S3S Square Edge | – | GH2134 |
| 5/4 x 2-1/2 x 12 S4S Square Edge | – | GI2134 |
| 5/4 x 5 x 12 S3S Square Edge | – | GJ2134 |
| 5/4 x 5 x 12 S4S Square Edge | – | GK2134 |
| 5/4 x 8 x 12 S3S Square Edge | GL2134 | – |

## Considerations

- Designed to fade and change color over time.
- Opaque dark brown.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

## Patina Scale

*More Colorfast* — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

## Wood Grade

### Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

### Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

## Profiles and Dimensions

(diagrams below are 20% actual size)

### 1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece




### 1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece




### 1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

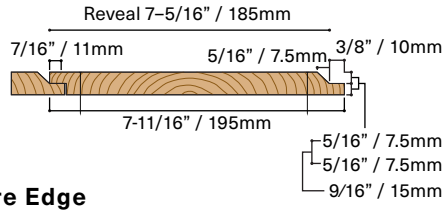


### 1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




### 1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece




### 5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece




### 5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece




### 5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece




*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

## Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

### Prefinish Options

1 coat + back oil: Coated on face and back only

### Prefinish Color

Brown

### Pressure-Treated Fire Retardant

Not available

### Field Cuts

Coat all field cuts and rips with touch up oil

## Species

*Cryptomeria japonica*, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

## Installation Details

### For installation instructions:

Contact sales@nakamotoforestry.com

### Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

### Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

### Substrate (Exterior)

Rigid furring maximum 16" on-center

### Installation Layout

Vertical or horizontal, all profiles

## Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

## Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

## Manufacturer

### Nakamoto Forestry North America

**Warehouse & Office** (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780