Suyaki Unoiled

The original yakisugi “shou sugi ban” siding. Charred, unbrushed, and unoiled Suyaki is the visual and cultural benchmark standard for the entire yakisugi product category. Certified ASTM E84 Class A Flame Spread. This product is very delicate and not suitable for high-traffic applications. It will blemish, is difficult to handle, and is not for the faint of heart. This is a great option for owners who appreciate the organic, natural beauty of wood and want to savor it as a living, evolving finish. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	SA2000	–
1 x 6 x 12 S3S Square Edge	SB2000	–
1 x 8 x 12 Shiplap	SE2000	–
1 x 8 x 12 S3S Square Edge	SF2000	–
1 x 2 x 12 S3S Square Edge	–	SG2000
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2000
5/4 x 5 x 12 S3S Square Edge	–	SJ2000
5/4 x 8 x 12 S3S Square Edge	SL2000	–

Considerations

- Handle with extreme care.
- Installers and the jobsite will get covered in soot during installation.
- Our most pure, all-in yakisugi option.
- Arguably the most beautiful black color there is in architecture.
- The most fire-resistant natural wood siding that we are aware of.
- Blemishes and soot erosion will develop over time and are the nature of this very traditional material.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the soot to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.

Patina Scale

More Colorfast — *More Patina*

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

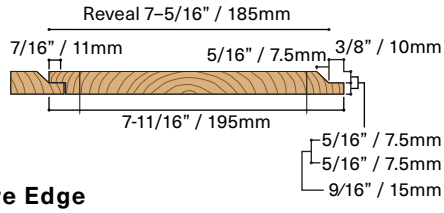

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The species, millwork, and heat treatment process make yakisugi "shou sugi ban" naturally resistant to pests, moisture, and fire. Coatings and stains are technically unnecessary for this product category. Leaving the wood unoiled allows it to weather naturally, according to the local climate. Unoiled siding can always be oiled in the future to add color or consistency.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Not Available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-centerr

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Suyaki Tung Oil Black

The original yakisugi “shou sugi ban” siding, sealed to be user-friendly. The charred, unbrushed, and oiled surface is suitable for exterior applications. It has a leathery texture with maximum wood and color longevity, and an even black color. This product is delicate and will blemish. It is not suitable for high-traffic applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	SA2411	–
1 x 6 x 12 S3S Square Edge	SB2411	–
1 x 8 x 12 Shiplap	SE2411	–
1 x 8 x 12 S3S Square Edge	SF2411	–
1 x 2 x 12 S3S Square Edge	–	SG2411
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2411
5/4 x 5 x 12 S3S Square Edge	–	SJ2411
5/4 x 8 x 12 S3S Square Edge	SL2411	–

Considerations

- Handle with extreme care.
- User-friendly material with a leathery surface that will patina slowly over time.
- Blemishes and soot erosion will develop over time and are the nature of this very traditional material.
- Easy touch up if scratched or scuffed.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the soot to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

01 — 0

1

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

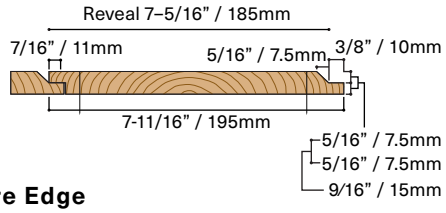

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Our unique tung oil blend was custom formulated specifically for exterior Suyaki®. This oil stain penetrates into and stabilizes the delicate soot layer, making it easier to handle during installation. The black pigment makes the siding very consistent in tone. The leathery texture will blemish and weather over time, and can easily be touched up.

Prefinish Options

Coated face only

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not Available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-centerr

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Suyaki Polyurethane Black

The original yakisugi “shou sugi ban” paneling, sealed to be user-friendly. The charred, unbrushed, and sealed surface is suitable for interior applications. It has a hard, durable, non-toxic, and washable surface, with even black color. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD PANELING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	SA2551	–
1 x 6 x 12 S3S Square Edge	SB2551	–
1 x 8 x 12 Shiplap	SE2551	–
1 x 8 x 12 S3S Square Edge	SF2551	–
1 x 2 x 12 S3S Square Edge	–	SG2551
5/4 x 2-1/2 x 12 S3S Square Edge	–	SH2551
5/4 x 5 x 12 S3S Square Edge	–	SJ2551
5/4 x 8 x 12 S3S Square Edge	SL2551	–

Considerations

- Easily touch up field cuts or damage with water-based polyurethane tinted black.
- Can be ripped, back-planed and glued up for interior door or cabinet applications.
- Non-toxic polyurethane coating.
- Not suitable for any exterior applications or prolonged exposure to moisture.
- Soot residue, caking, and abrasion damage is unavoidable and will cause the soot to blemish, especially along board edges. This is a natural characteristic of this product and can be touched up as required.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

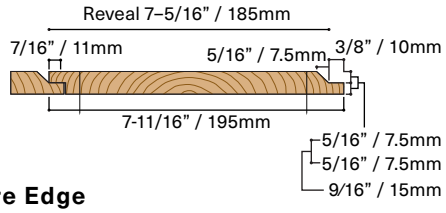

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The non-toxic interior polyurethane coating is clean and hard and protects the wood from dirt and abrasion. It can easily be wiped clean with a moist cloth or touched up with most water-based polyurethanes. It is not suitable for exterior applications or where the siding is consistently exposed to moisture.

Prefinish Options

Coated 6 sides

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not Available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Gendai Unoiled

Yakisugi “shou sugi ban” siding and paneling. The top layer of soot has been gently brushed off, leaving a smooth, consistent, and dark surface. Uncoated Gendai is a quintessential Japanese wabi-sabi siding material that quickly develops a rich patina from exposure. It is naturally weather- and fire-resistant due to being heat-treated. This is a great option for owners who appreciate the organic, natural beauty of wood and want to savor it as a living, changing finish. Can be coated with an oil finish at installation or any time in future. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Select+Fire Retardant
1 x 6 x 12 Shiplap	GA2000	GD2000	XA2000
1 x 6 x 12 S3S Square Edge	GB2000	–	–
1 x 6 x 12 S4S Square Edge	GC2000	–	–
1 x 8 x 12 Shiplap	GE2000	–	–
1 x 8 x 12 S3S Square Edge	GF2000	–	–
1 x 2 x 12 S3S Square Edge	–	GG2000	–
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2000	–
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2000	–
5/4 x 5 x 12 S3S Square Edge	–	GJ2000	–
5/4 x 5 x 12 S4S Square Edge	–	GK2000	–
5/4 x 8 x 12 S3S Square Edge	GL2000	–	–

Considerations

- Our most dramatic sabi patina product.
- Every project will weather differently due to unique microclimates.
- Traditionally used on interior ceilings as an air purifier.
- Soot residue, caking, and erosion, especially along board edges, is unavoidable and is the nature of this product.
- Can be coated with an oil finish at installation or any time in future.

Patina Scale

More Colorfast 0 — 10 *More Patina*

10

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

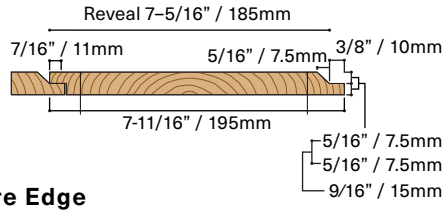

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The species, millwork and heat treatment process make yakisugi "shou sugi ban" naturally resistant to pests, moisture, and fire. Coatings and stains are technically unnecessary for this product category. Leaving the wood unoiled allows it to weather naturally, according to the local climate. Unoiled siding can always be oiled in the future to add color or consistency.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Available Select grade 1x6x12 shiplap only

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

www.pefc.org

PEFC/29-31-385

Gendai Weathering Stain Silver

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth and consistent surface. Suitable for exterior applications. Available burned both faces (S4S) for fencing or louver applications. A weathering stain is applied prior to shipment. Our weathering stain is designed to mimic the look of moisture-aged, silver wood. The initial silver pigment in the stain will wash off of the walls within the first several seasons, leaving them to turn a beautiful and unique brown to silver range. The color will continue to change and patina over time. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2618	GD2618
1 x 6 x 12 S3S Square Edge	GB2618	–
1 x 6 x 12 S4S Square Edge	GC2618	–
1 x 8 x 12 Shiplap	GE2618	–
1 x 8 x 12 S3S Square Edge	GF2618	–
1 x 2 x 12 S3S Square Edge	–	GG2618
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2618
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2618
5/4 x 5 x 12 S3S Square Edge	–	GJ2618
5/4 x 5 x 12 S4S Square Edge	–	GK2618
5/4 x 8 x 12 S3S Square Edge	GL2618	–

Considerations

- This patina siding product has a unique living finish.
- Designed to weather from pigmented silver to faded silver over time.
- Due to its composition, the factory silver stain can be uneven in color and tone, and can appear blotchy.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

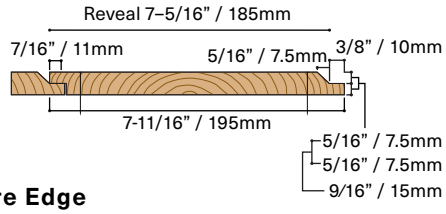

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Our silver weathering stain is based on the Cape Cod gray aesthetic and is for exterior applications only. It is designed to be a maintenance-free living finish that develops a bleached coastal patina over time. The stain has two components. One is the initial silver pigment designed to wash off. The second is a mineral that reacts with atmospheric moisture and tannic acid in the wood, to develop a bleached silver color.

Prefinish Options

Stained face only
*S4S square edge profiles are burned and stained on face and back

Prefinish Color

Silver

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up stain

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Linseed Black

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2131	GD2131
1 x 6 x 12 S3S Square Edge	GB2131	–
1 x 6 x 12 S4S Square Edge	GC2131	–
1 x 8 x 12 Shiplap	GE2131	–
1 x 8 x 12 S3S Square Edge	GF2131	–
1 x 2 x 12 S3S Square Edge	–	GG2131
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2131
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2131
5/4 x 5 x 12 S3S Square Edge	–	GJ2131
5/4 x 5 x 12 S4S Square Edge	–	GK2131
5/4 x 8 x 12 S3S Square Edge	GL2131	–

Considerations

- Our best selling product.
- Quintessential refined black look that matches many project aesthetics.
- Black stands out during the day and disappears at night.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

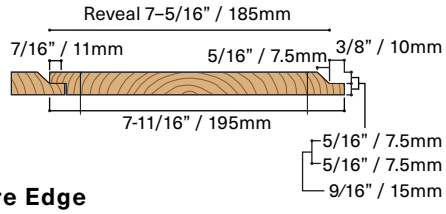

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Linseed Amber

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2133	GD2133
1 x 6 x 12 S3S Square Edge	GB2133	–
1 x 6 x 12 S4S Square Edge	GC2133	–
1 x 8 x 12 Shiplap	GE2133	–
1 x 8 x 12 S3S Square Edge	GF2133	–
1 x 2 x 12 S3S Square Edge	–	GG2133
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2133
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2133
5/4 x 5 x 12 S3S Square Edge	–	GJ2133
5/4 x 5 x 12 S4S Square Edge	–	GK2133
5/4 x 8 x 12 S3S Square Edge	GL2133	–

Considerations

- Designed to fade and change color over time.
- Opulent light brown living finish.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

6

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

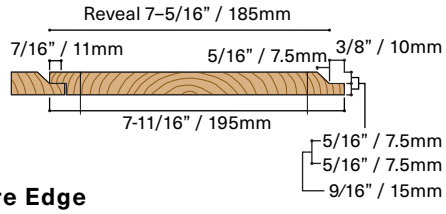

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Amber

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Linseed Brown

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2134	GD2134
1 x 6 x 12 S3S Square Edge	GB2134	–
1 x 6 x 12 S4S Square Edge	GC2134	–
1 x 8 x 12 Shiplap	GE2134	–
1 x 8 x 12 S3S Square Edge	GF2134	–
1 x 2 x 12 S3S Square Edge	–	GG2134
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2134
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2134
5/4 x 5 x 12 S3S Square Edge	–	GJ2134
5/4 x 5 x 12 S4S Square Edge	–	GK2134
5/4 x 8 x 12 S3S Square Edge	GL2134	–

Considerations

- Designed to fade and change color over time.
- Opaque dark brown.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

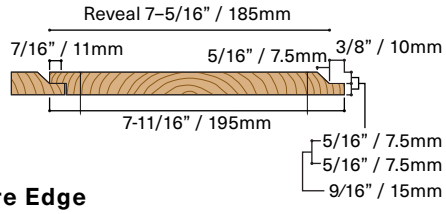

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Brown

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Linseed Dark Gray

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2135	GD2135
1 x 6 x 12 S3S Square Edge	GB2135	–
1 x 6 x 12 S4S Square Edge	GC2135	–
1 x 8 x 12 Shiplap	GE2135	–
1 x 8 x 12 S3S Square Edge	GF2135	–
1 x 2 x 12 S3S Square Edge	–	GG2135
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2135
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2135
5/4 x 5 x 12 S3S Square Edge	–	GJ2135
5/4 x 5 x 12 S4S Square Edge	–	GK2135
5/4 x 8 x 12 S3S Square Edge	GL2135	–

Considerations

- This product has a very dark and refined appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

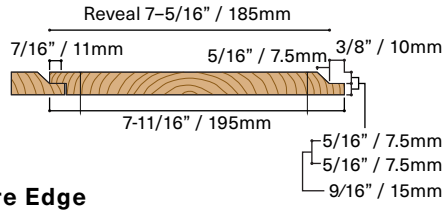

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Dark Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Linseed Light Gray

Yakisugi “shou sugi ban” siding. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. A highly contrasting light gray natural linseed oil prefinish is applied prior to shipment. Suitable for exterior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2136	GD2136
1 x 6 x 12 S3S Square Edge	GB2136	–
1 x 6 x 12 S4S Square Edge	GC2136	–
1 x 8 x 12 Shiplap	GE2136	–
1 x 8 x 12 S3S Square Edge	GF2136	–
1 x 2 x 12 S3S Square Edge	–	GG2136
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2136
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2136
5/4 x 5 x 12 S3S Square Edge	–	GJ2136
5/4 x 5 x 12 S4S Square Edge	–	GK2136
5/4 x 8 x 12 S3S Square Edge	GL2136	–

Considerations

- Light gray color can conceal fading better than other color options.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

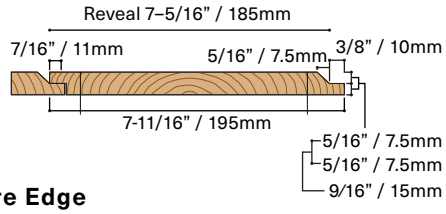

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Light Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Alkyd Black

Yakisugi “shou sugi ban” siding and paneling. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. Two coats of a plant-derived architectural grade alkyd oil prefinish is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2321	GD2321
1 x 6 x 12 S3S Square Edge	GB2321	–
1 x 6 x 12 S4S Square Edge	GC2321	–
1 x 8 x 12 Shiplap	GE2321	–
1 x 8 x 12 S3S Square Edge	GF2321	–
1 x 2 x 12 S3S Square Edge	–	GG2321
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2321
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2321
5/4 x 5 x 12 S3S Square Edge	–	GJ2321
5/4 x 5 x 12 S4S Square Edge	–	GK2321
5/4 x 8 x 12 S3S Square Edge	GL2321	–

Considerations

- Our most priced and rendered product during initial yakisugi “shou sugi ban” general siding specification.
- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Matches most project aesthetics.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

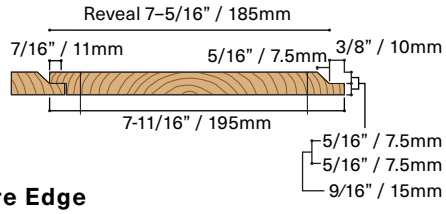

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Alkyd Natural

Yakisugi “shou sugi ban” siding and paneling. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. Two coats of a plant-derived architectural grade alkyd oil prefinish is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2322	GD2322
1 x 6 x 12 S3S Square Edge	GB2322	–
1 x 6 x 12 S4S Square Edge	GC2322	–
1 x 8 x 12 Shiplap	GE2322	–
1 x 8 x 12 S3S Square Edge	GF2322	–
1 x 2 x 12 S3S Square Edge	–	GG2322
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2322
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2322
5/4 x 5 x 12 S3S Square Edge	–	GJ2322
5/4 x 5 x 12 S4S Square Edge	–	GK2322
5/4 x 8 x 12 S3S Square Edge	GL2322	–

Considerations

- Designed to gradually fade from dark to medium brown, then to tan and gray over several years. Gendai with Alkyd Oil Natural cannot be returned to the factory color, however it can be recoated with pigmented stains any time in future.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

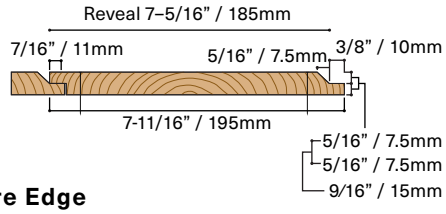

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Natural

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Alkyd Brown

Yakisugi “shou sugi ban” siding and paneling. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. Two coats of a plant-derived architectural grade alkyd oil prefinish is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2324	GD2324
1 x 6 x 12 S3S Square Edge	GB2324	–
1 x 6 x 12 S4S Square Edge	GC2324	–
1 x 8 x 12 Shiplap	GE2324	–
1 x 8 x 12 S3S Square Edge	GF2324	–
1 x 2 x 12 S3S Square Edge	–	GG2324
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2324
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2324
5/4 x 5 x 12 S3S Square Edge	–	GJ2324
5/4 x 5 x 12 S4S Square Edge	–	GK2324
5/4 x 8 x 12 S3S Square Edge	GL2324	–

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

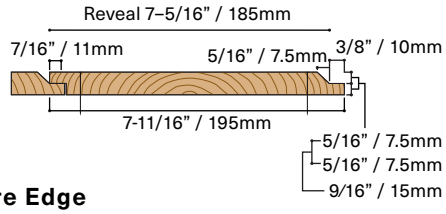

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Brown

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Alkyd Dark Gray

Yakisugi “shou sugi ban” siding and paneling. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. Two coats of a plant-derived architectural grade alkyd oil prefinish is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2325	GD2325
1 x 6 x 12 S3S Square Edge	GB2325	–
1 x 6 x 12 S4S Square Edge	GC2325	–
1 x 8 x 12 Shiplap	GE2325	–
1 x 8 x 12 S3S Square Edge	GF2325	–
1 x 2 x 12 S3S Square Edge	–	GG2325
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2325
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2325
5/4 x 5 x 12 S3S Square Edge	–	GJ2325
5/4 x 5 x 12 S4S Square Edge	–	GK2325
5/4 x 8 x 12 S3S Square Edge	GL2325	–

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

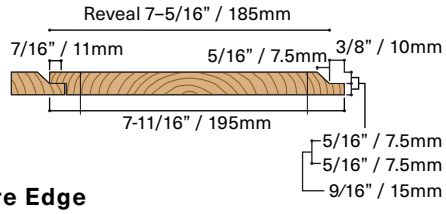

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Dark Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai Alkyd Light Gray

Yakisugi “shou sugi ban” siding and paneling. The top layer of delicate soot has been gently brushed off, leaving a smooth, consistent and dark surface. Two coats of a plant-derived architectural grade alkyd oil prefinish is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces (S4S) for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	GA2326	GD2326
1 x 6 x 12 S3S Square Edge	GB2326	–
1 x 6 x 12 S4S Square Edge	GC2326	–
1 x 8 x 12 Shiplap	GE2326	–
1 x 8 x 12 S3S Square Edge	GF2326	–
1 x 2 x 12 S3S Square Edge	–	GG2326
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2326
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2326
5/4 x 5 x 12 S3S Square Edge	–	GJ2326
5/4 x 5 x 12 S4S Square Edge	–	GK2326
5/4 x 8 x 12 S3S Square Edge	GL2326	–

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Light gray color can conceal fading better than other color options.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

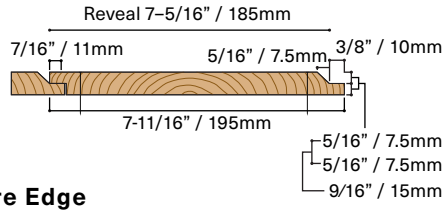

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Light Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Gendai with Warranted Acrylic Coating Black

Yakisugi “shou sugi ban” siding and paneling. The top layer of soot has been gently brushed off, leaving a smooth and consistent surface. A warranted acrylic coating is applied prior to shipment. Suitable for exterior and interior applications. Available burned both faces for fencing or louver applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Select + Fire Retardant
1 x 6 x 12 Shiplap	GA2751	GD2751	XA2751
1 x 6 x 12 S3S Square Edge	GB2751	–	
1 x 6 x 12 S4S Square Edge	GC2751	–	
1 x 8 x 12 Shiplap	GE2751	–	
1 x 8 x 12 S3S Square Edge	GF2751	–	
1 x 2 x 12 S3S Square Edge	–	GG2751	
5/4 x 2-1/2 x 12 S3S Square Edge	–	GH2751	
5/4 x 2-1/2 x 12 S4S Square Edge	–	GI2751	
5/4 x 5 x 12 S3S Square Edge	–	GJ2751	
5/4 x 5 x 12 S4S Square Edge	–	GK2751	
5/4 x 8 x 12 S3S Square Edge	GL2751	–	

Considerations

- Great option for institutional or other projects requiring the best coating performance.
- Architectural grade coating field tested for generations.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast 0 — 10 *More Patina*

0

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

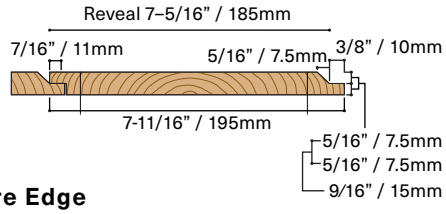

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



5/4 x 2-1/2 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 2.33 SF/piece



5/4 x 5 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 4.75 SF/piece



5/4 x 8 x 12 S3S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Acrylic latex coatings offer the best color durability on the market by being high adhesion, high build and solid color. This finish is designed to withstand challenging exterior environments, has been tested in the field for over 60 years and carries a limited manufacturer warranty of 25 years.

Prefinish Options
Coated on 4 sides

Prefinish Color
Black

Pressure-Treated Fire Retardant
Available Select grade 1x6x12 shiplap only

Field Cuts
Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Warranty

Lumber products carry a limited 5 year warranty from major millwork defects. The acrylic coating option carries a 25-year limited manufacturer warranty. Other coatings, treatments, accessories, and special offers are excluded. Warranty remedies are not available if requirements are not followed. Please reference our Terms and Conditions for details.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Installation Details

For installation instructions:
Contact sales@nakamotoforestry.com

Overage
Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)
Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)
Rigid furring maximum 16" on-center

Fastening (Interior)
Tube adhesive and pin nails

Substrate (Interior)
Per design specifications

Installation Layout
Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Unoiled

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Suitable for exterior and interior applications. We recommend applying a finish before installation to prevent sooty fingerprints.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Select+Fire Retardant
1 x 6 x 12 Shiplap	PA2000	PD2000	YA2000
1 x 6 x 12 S3S Square Edge	PB2000	–	
1 x 6 x 12 S4S Square Edge	PC2000	–	
1 x 8 x 12 Shiplap	PE2000	–	
1 x 8 x 12 S3S Square Edge	PF2000	–	
1 x 2 x 12 S3S Square Edge	–	PG2000	

Considerations

- Be careful of leaving sooty fingerprints when handling Pika-Pika before it is coated.
- Soot can be cleaned off with a dry paint brush or compressed air.
- Please apply and dry oil stains or coatings in horizontal orientation and before installation. If an oil stain is applied after installation please back brush the siding or paneling for an even finish.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

8

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

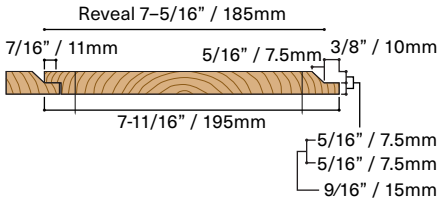

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Unoiled Pika-Pika is designed to be stained or coated by the customer before installation. This is a great option for contractors wanting to apply their preferred finish formula, or designers wanting a custom color or tone. Please be very careful to avoid sooty fingerprints when handling this product without a coating.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Available Select grade 1x6x12 shiplap only

Field Cuts

N/A

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Polyurethane Clear

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A clear polyurethane is applied prior to shipping. Suitable for interior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD PANELING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2529	PD2529
1 x 6 x 12 S3S Square Edge	PB2529	–
1 x 8 x 12 Shiplap	PE2529	–
1 x 8 x 12 S3S Square Edge	PF2529	–

Considerations

- The non-toxic interior polyurethane coating has a satin sheen.
- Dramatically shows the opulent, natural wood grain.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

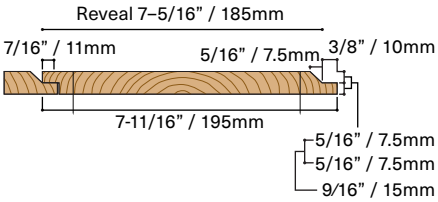

*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The non-toxic interior polyurethane coating is clean and hard and protects the wood from dirt and abrasion. It can easily be wiped clean with a moist cloth or touched up with most water-based polyurethanes. It is not suitable for exterior applications or where the siding is consistently exposed to moisture.

Prefinish Options

2 coats face only

Prefinish Color

Clear

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Black

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2131	PD2131
1 x 6 x 12 S3S Square Edge	PB2131	–
1 x 6 x 12 S4S Square Edge	PC2131	–
1 x 8 x 12 Shiplap	PE2131	–
1 x 8 x 12 S3S Square Edge	PF2131	–
1 x 2 x 12 S3S Square Edge	–	PG2131

Considerations

- This product is our shop favorite. It is stunningly beautiful in person.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

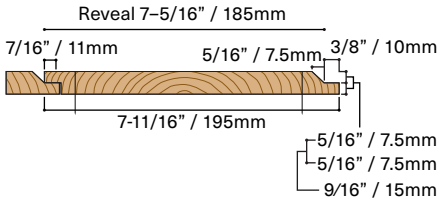

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Natural

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2132	PD2132
1 x 6 x 12 S3S Square Edge	PB2132	–
1 x 6 x 12 S4S Square Edge	PC2132	–
1 x 8 x 12 Shiplap	PE2132	–
1 x 8 x 12 S3S Square Edge	PF2132	–
1 x 2 x 12 S3S Square Edge	–	PG2132

Considerations

- Showcases the natural wood grain and color best among our exterior yakisugi “shou sugi ban” products.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

6

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

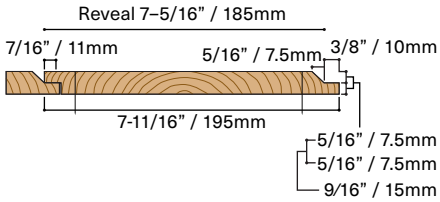

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Natural

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Amber

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2133	PD2133
1 x 6 x 12 S3S Square Edge	PB2133	–
1 x 6 x 12 S4S Square Edge	PC2133	–
1 x 8 x 12 Shiplap	PE2133	–
1 x 8 x 12 S3S Square Edge	PF2133	–
1 x 2 x 12 S3S Square Edge	–	PG2133

Considerations

- Transparent oxide UV inhibitors in the oil finish slow down weathering while showcasing the natural wood grain.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

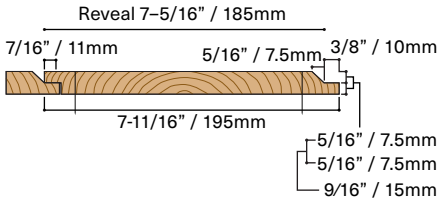

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Amber

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Brown

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2134	PD2134
1 x 6 x 12 S3S Square Edge	PB2134	–
1 x 6 x 12 S4S Square Edge	PC2134	–
1 x 8 x 12 Shiplap	PE2134	–
1 x 8 x 12 S3S Square Edge	PF2134	–
1 x 2 x 12 S3S Square Edge	–	PG2134

Considerations

- Our best-selling Pika-Pika product worldwide.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 5 — 10

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

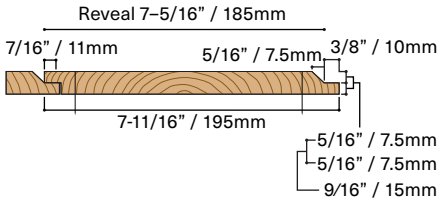

*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Brown

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Dark Gray

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2135	PD2135
1 x 6 x 12 S3S Square Edge	PB2135	–
1 x 6 x 12 S4S Square Edge	PC2135	–
1 x 8 x 12 Shiplap	PE2135	–
1 x 8 x 12 S3S Square Edge	PF2135	–
1 x 2 x 12 S3S Square Edge	–	PG2135

Considerations

- Rich gray color with burnt wood undertones.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

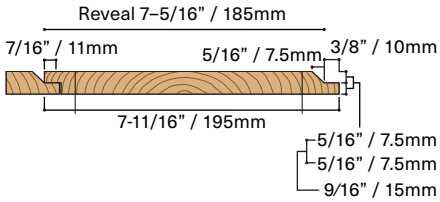

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Dark Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed Light Gray

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2136	PD2136
1 x 6 x 12 S3S Square Edge	PB2136	–
1 x 6 x 12 S4S Square Edge	PC2136	–
1 x 8 x 12 Shiplap	PE2136	–
1 x 8 x 12 S3S Square Edge	PF2136	–
1 x 2 x 12 S3S Square Edge	–	PG2136

Considerations

- Light gray color can conceal fading better than other pigment color options.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast 0 — 5 — 10 *More Patina*

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

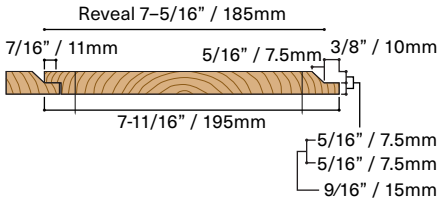

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

Light Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Linseed White

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. A natural linseed oil is applied prior to shipping. Suitable for exterior applications only. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2137	PD2137
1 x 6 x 12 S3S Square Edge	PB2137	–
1 x 6 x 12 S4S Square Edge	PC2137	–
1 x 8 x 12 Shiplap	PE2137	–
1 x 8 x 12 S3S Square Edge	PF2137	–
1 x 2 x 12 S3S Square Edge	–	PG2137

Considerations

- The semi-transparent white stain soaks into the wood, highlighting the grain’s natural pink and amber colors.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

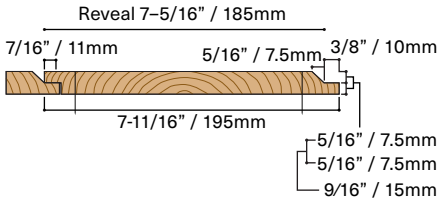

*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-transparent linseed oil stain is designed to balance raw, natural beauty with color longevity. It absorbs into the wood, conditioning and enhancing the grain. The linseed finish is an excellent choice for owners who want to enjoy the inherent beauty of the wood as it weathers. The siding can be left to patina or re-oiled at any time to freshen up the color.

Prefinish Options

1 coat + back oil: Coated on face and back only

Prefinish Color

White

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd Black

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2321	PD2321
1 x 6 x 12 S3S Square Edge	PB2321	–
1 x 6 x 12 S4S Square Edge	PC2321	–
1 x 8 x 12 Shiplap	PE2321	–
1 x 8 x 12 S3S Square Edge	PF2321	–
1 x 2 x 12 S3S Square Edge	–	PG2321

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select



JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

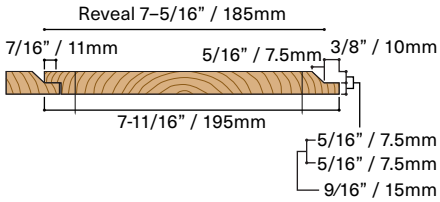

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Black

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd Natural

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2322	PD2322
1 x 6 x 12 S3S Square Edge	PB2322	–
1 x 6 x 12 S4S Square Edge	PC2322	–
1 x 8 x 12 Shiplap	PE2322	–
1 x 8 x 12 S3S Square Edge	PF2322	–
1 x 2 x 12 S3S Square Edge	–	PG2322

Considerations

- Great color longevity for a natural pigment coating.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

5

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

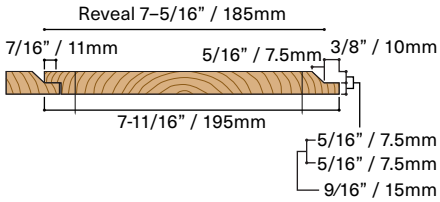

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Natural

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd Brown

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2324	PD2324
1 x 6 x 12 S3S Square Edge	PB2324	–
1 x 6 x 12 S4S Square Edge	PC2324	–
1 x 8 x 12 Shiplap	PE2324	–
1 x 8 x 12 S3S Square Edge	PF2324	–
1 x 2 x 12 S3S Square Edge	–	PG2324

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Fades and changes color over time.
- Sort this product by tone on each wall section when installing for a more uniform appearance.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

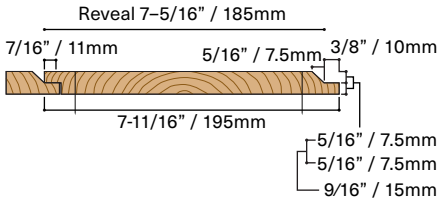

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Brown

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd Dark Gray

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2325	PD2325
1 x 6 x 12 S3S Square Edge	PB2325	–
1 x 6 x 12 S4S Square Edge	PC2325	–
1 x 8 x 12 Shiplap	PE2325	–
1 x 8 x 12 S3S Square Edge	PF2325	–
1 x 2 x 12 S3S Square Edge	–	PG2325

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

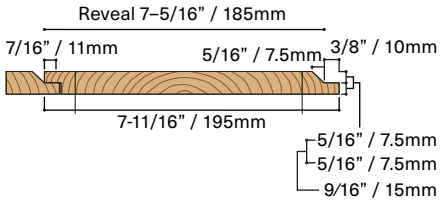

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Dark Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd Light Gray

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2326	PD2326
1 x 6 x 12 S3S Square Edge	PB2326	–
1 x 6 x 12 S4S Square Edge	PC2326	–
1 x 8 x 12 Shiplap	PE2326	–
1 x 8 x 12 S3S Square Edge	PF2326	–
1 x 2 x 12 S3S Square Edge	–	PG2326

Considerations

- Light gray color conceals fading better than other color options.
- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear



Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

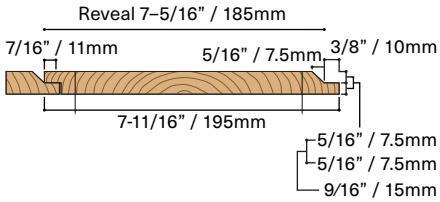

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

Light Gray

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika Alkyd White

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed and textured surface. Most of the soot is removed, revealing a striped pattern. Two coats of a plant-derived architectural grade alkyd coating are applied prior to shipping. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	PA2327	PD2327
1 x 6 x 12 S3S Square Edge	PB2327	–
1 x 6 x 12 S4S Square Edge	PC2327	–
1 x 8 x 12 Shiplap	PE2327	–
1 x 8 x 12 S3S Square Edge	PF2327	–
1 x 2 x 12 S3S Square Edge	–	PG2327

Considerations

- Use a minimum amount of touch up oil and immediately wipe off residue to prevent glossy spots.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast — *More Patina*

0 — 10

2

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

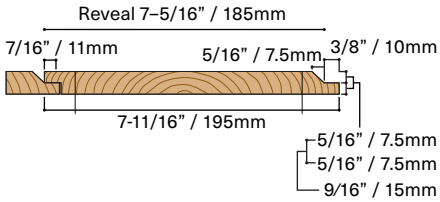

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

The semi-solid alkyd oil stain is a permeable yet protective coating, with good texture and color. It is a very durable water-based stain, resistant to moisture and UV radiation. The alkyd oil stain is a great option for those who are looking for color consistency over natural patina.

Prefinish Options

2 coats face: Coated on face and back only

Prefinish Color

White

Pressure-Treated Fire Retardant

Not available

Field Cuts

Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)

Rigid furring maximum 16" on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Pika-Pika with Warranted Acrylic Coating Black

Yakisugi “shou sugi ban” siding and paneling. Wire-brushed surface with most soot removed, revealing a defined grain texture. Three coats of a warranted acrylic coating is applied prior to shipment. Suitable for exterior and interior applications. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
CHARRED WOOD [SIDING] [&] [PANELING]

Scan QR code for pricing, sustainability and other data

Profile	Grade		
	Select	Premium Clear	Select+Fire Retardant
1 x 6 x 12 Shiplap	PA2751	PD2751	YA2751
1 x 6 x 12 S3S Square Edge	PB2751	–	
1 x 6 x 12 S4S Square Edge	PC2751	–	
1 x 8 x 12 Shiplap	PE2751	–	
1 x 8 x 12 S3S Square Edge	PF2751	–	
1 x 2 x 12 S3S Square Edge	–	PG2751	

Considerations

- Great option for institutional or other projects requiring the best coating performance.
- Architectural grade coating field tested for generations.
- Soot residue, caking, and erosion is unavoidable and will cause the finish to blemish, especially along board edges. This is a natural characteristic of this product.
- To prevent blocking between boards as well as abrasion blemishes, keep boards slip-sheeted until installation.

Patina Scale

More Colorfast 0 — 10 *More Patina*

0

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 (“less patina/more color longevity”) to 10 (“less color longevity/more patina”). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 6 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S & S4S Square Edge

- Charred 3 or 4 sides
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 Shiplap

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.33 SF/piece

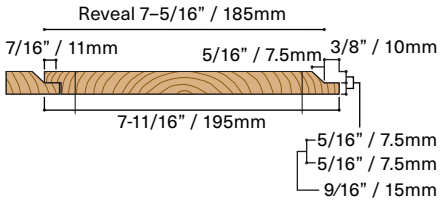

1 x 8 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 7.75 SF/piece



1 x 2 x 12 S3S Square Edge

- Charred 3 sides
- 145-11/16" (3700mm) length
- 1.75 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Acrylic latex coatings offer the best color durability on the market by being high adhesion, high build and solid color. This finish is designed to withstand challenging exterior environments, has been tested in the field for over 60 years and carries a limited manufacturer warranty of 25 years.

Prefinish Options
Coated on 4 sides

Prefinish Color
Black

Pressure-Treated Fire Retardant
Available Select grade 1x6x12 shiplap only

Field Cuts
Coat all field cuts and rips with touch up oil

Species

Cryptomeria japonica, a monotypic genus in the cypress family native to Japan. The Japanese name is "sugi", as in yakisugi and "shou sugi ban". In English it is colloquially called Japanese cedar.

Warranty

Lumber products carry a limited 5 year warranty from major millwork defects. Coatings, treatments, accessories, and special offers are excluded. The acrylic coating option carries a 25-year limited manufacturer warranty. Warranty remedies are not available if requirements are not followed. Please reference our Terms and Conditions for details.

Installation Details

For installation instructions:
Contact sales@nakamotoforestry.com

Overage
Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)
Two ring or screw-shank headed face nails or screws per furring strip within 1" of each edge

Substrate (Exterior)
Rigid furring maximum 16" on-center

Fastening (Interior)
Tube adhesive and pin nails

Substrate (Interior)
Per design specifications

Installation Layout
Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Sugi Vertical Grain Siding, Paneling and Rough Lumber Unoiled

High-grade clear vertical grain Japanese Sugi siding, paneling, and rough lumber. Quartersawn premium straight logs, graded for color and grain. Siding and paneling are available in nickel gap shiplap and sanded to 120grit. Rough lumber is available in 8/4 thickness, random widths, and multiple lengths. Suitable for exterior and interior applications, with or without a coating. Substitute on projects where North American cedar or cypress are specified. Delivered ready to install, mill, or coat.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00, 06 40 00 or 07 46 00
WOOD [SIDING] [&] [PANELING] [&] [MILLWORK]

Scan QR code for pricing, sustainability and other data

Profile	Clear Vertical Grain
1 x 5 x 12 Nickel Gap Shiplap	CQ2000
1 x 6 x 12 Nickel Gap Shiplap	CR2000
8/4 Rough Lumber 78-3/4" – 94-1/2" (2000 – 2400mm) Lengths	CS8000
8/4 Rough Lumber 165-3/8" (4200mm) Lengths	CS4000

Considerations

- Alternate for tight grain old growth specifications.
- Rich, clean and beautiful material, with great color range.
- Raw sugi has a distinctive, pleasing cedar aroma.
- Can be stained or coated on site, or enjoyed uncoated. Oil stain application and maintenance will dramatically increase siding longevity.
- Please apply and dry oil stains or coatings in horizontal orientation and before installation. If an oil stain is applied after installation please back brush the siding or paneling for an even finish.
- Rough lumber for millwork, case work, furniture, etc.

Wood Grade

Clear Vertical Grain

Clear vertical grain grade allows for up to 4 tight or 3 dead pinhole knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are at 20% actual size)

1 x 5 x 12 Nickel Gap Shiplap

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 4.75 SF/piece



1 x 6 x 12 Nickel Gap Shiplap

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 6 SF/piece



8/4 Rough Lumber – Vertical Grain

- Rough sawn
- 78-3/4" – 165-3/8" (2000 – 4200mm) lengths
- 2-3/8" – 9-7/16" (60 – 240mm) widths



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Sugi is often left unoiled in clean interior applications, or in exterior applications where a patina is desired. It can also be coated by the customer with standard tradecraft before or after installation. Leaving the wood unoiled in exterior applications allows it to weather naturally, according to the local climate.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Please inquire with our sales team.

Field Cuts

N/A

Species

Cryptomeria japonica, a monotypic genus in the Cypress family native to Japan. The Japanese name is “Sugi” (as in yakisugi and “shou sugi ban”). In English it is colloquially called Japanese Cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1” of each edge

Substrate (Exterior)

Rigid furring maximum 16” on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Sugi Flat Grain Siding Weathering Stain Silver

High-grade Japanese Sugi siding. Straight logs, flat sawn, graded for color and grain, then sanded. Suitable for exterior applications only. Substitute on projects where North American cedar or cypress are specified. A weathering stain is applied prior to shipment. Our weathering stain is designed to mimic the look of moisture-aged, silver wood. The initial silver pigment in the stain will wash off of the walls within the first several seasons, leaving them to turn a beautiful and unique brown to silver range. The color will continue to change and patina over time. Delivered ready to install.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
WOOD SIDING

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	CA2618	CD2618
1 x 6 x 12 S3S Square Edge	CB2618	–
1 x 8 x 12 S3S Square Edge	CF2618	–

Considerations

- Alternate for many cedar or cypress specifications.
- This patina siding product has a unique living finish. Designed to weather from pigmented silver to faded silver over time.
- Due to its composition, the factory silver stain can be uneven in color and tone, and can appear blotchy.

Patina Scale

The Patina Scale has been developed by Nakamoto Forestry to approximate how its products will weather over time—from 0 ("less patina/more color longevity") to 10 ("less color longevity/more patina"). However, every product weathers at a different rate due to local conditions, and the Patina Scale is intended as general guidance only, and is solely for informational purposes. Nakamoto Forestry makes no guarantees, representations, or warranties, express or implied, regarding the appearance or color longevity of its products after installation.

Wood Grade

Select

JAS "Small Knot" grade allows for up to 20 tight or 10 dead knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are at 20% actual size)

1 x 6 x 12 Shiplap

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S Square Edge

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 S3S Square Edge

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 7.5 SF/piece



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Our silver weathering stain is based on the Cape Cod gray aesthetic and is for exterior applications only. It is designed to be a maintenance-free living finish that develops a bleached coastal patina over time. The stain has two components. One is the initial silver pigment designed to wash off. The second is a mineral that reacts with atmospheric moisture and tannic acid in the wood, to develop a bleached silver color.

Prefinish Options

Stained face only

Prefinish Color

Silver

Pressure-Treated Fire Retardant

Please inquire with our sales team.

Field Cuts

Coat all field cuts and rips with touchup stain

Species

Cryptomeria japonica, a monotypic genus in the Cypress family native to Japan. The Japanese name is “Sugi” (as in yakisugi and “shou sugi ban”). In English it is colloquially called Japanese Cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1” of each edge

Substrate (Exterior)

Rigid furring maximum 16” on-center

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Sugi Flat Grain Siding, Paneling and Rough Lumber Unoiled

High-grade Japanese Sugi siding, paneling, and rough lumber. Straight logs, flat sawn, graded for color and grain. Suitable for exterior and interior applications, with or without a coating. Substitute on projects where North American cedar or cypress are specified. Delivered ready to install, mill, or coat.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00, 06 40 00 or 07 46 00
WOOD [SIDING] [&] [PANELING] [&] [MILLWORK]

Scan QR code for pricing, sustainability and other data

Profile	Grade	
	Select	Premium Clear
1 x 6 x 12 Shiplap	CA2000	CD2000
1 x 6 x 12 S3S Square Edge	CB2000	–
1 x 8 x 12 S3S Square Edge	CF2000	–
8/4 Rough Lumber 157 -1/2" (4000mm) Lengths	–	CT4000

Considerations

- Alternate for many cedar or cypress specifications.
- Rich, clean and beautiful material, with great color range.
- Raw sugi has a distinctive, pleasing cedar aroma.
- Can be stained or coated on site, or enjoyed uncoated. Oil stain application and maintenance will dramatically increase siding longevity.
- Please apply and dry oil stains or coatings in horizontal orientation and before installation. If an oil stain is applied after installation please back brush the siding or paneling for an even finish.
- Rough lumber for millwork, case work, furniture, etc.

Wood Grade

Select

JAS “Small Knot” grade allows for up to 20 tight or 10 dead knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79” (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16” as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are at 20% actual size)

1 x 6 x 12 Shiplap

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 5.33 SF/piece



1 x 6 x 12 S3S Square Edge

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 5.75 SF/piece



1 x 8 x 12 S3S Square Edge

- Sanded 120 grit
- 145-11/16" (3700mm) length
- 7.5 SF/piece



8/4 Rough Lumber - Flat Grain

- Rough sawn
- 157-1/2" (4000mm) lengths
- 7-1/16" – 9-7/16" (180 – 240mm) widths



*Dimensional shrinkage after manufacture is possible due to being a solid-sawn wood product.

Prefinish

Sugi is often left unoiled in clean interior applications, or in exterior applications where a patina is desired. It can also be coated by the customer with standard tradecraft before or after installation. Leaving the wood unoiled in exterior applications allows it to weather naturally, according to the local climate.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Please inquire with our sales team.

Field Cuts

N/A

Species

Cryptomeria japonica, a monotypic genus in the Cypress family native to Japan. The Japanese name is “Sugi” (as in yakisugi and “shou sugi ban”). In English it is colloquially called Japanese Cedar.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Exterior)

Two ring or screw-shank headed face nails or screws per furring strip within 1” of each edge

Substrate (Exterior)

Rigid furring maximum 16” on-center

Fastening (Interior)

Tube adhesive and pin nails

Substrate (Interior)

Per design specifications

Installation Layout

Vertical or horizontal, all profiles

Fire Resistance

ASTM E2707 & CSFM 12-7A-1 WUI
ASTM E-84

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Hinoki Paneling, Flooring, and Rough Lumber

Hinoki cypress (Chamaecyparis obtusa) is an aromatic and rot-resistant lumber species native to central and southern Japan. The wood's straight grain, light color, and luxe planed sheen make it an ideal aesthetic material for wall, floor, and ceiling surfaces, casework, millwork, and furniture, and exterior decking. Our curated assortment of premium clear grade flat sawn hinoki paneling, 1x moulder blanks, and 8/4 rough lumber products is adaptable to achieve many applications.

Copy and Paste into Appropriate CSI Division
SECTION 06 26 00 or 07 46 00
WOOD [SIDING] [&] [PANELING] [&] [MILLWORK]

Scan QR code for pricing, sustainability and other data

Profile	Premium Clear Grade
Nickel Gap T&G	HM2000
S3S Relieved	HM2002
T&G	HM2003
1 x 5 x 12 Moulder Blank	HM2004
8/4 Rough Lumber 157-1/2" – 169-5/16" (4000 – 4300mm)	HM2001

Considerations

- Moulder blanks are rough-sawn and dried, ready for your local moulder or millwork shop
- Ideal for saunas, interior paneling, ceilings, flooring, cabinetry, millwork, furniture, decking, or other applications
- Prized for its natural aromatics, rot-resistance, and blonde color
- If coated with a finish, the wood will lose its fragrant qualities
- Will develop brown flecks or marbling in exterior exposure
- Can be substituted for Port Orford Cedar in most specifications
- Allow for up to 10% expansion and contraction in the paneling profile or other millwork in sauna applications

Wood Grade

Premium Clear

Premium Clear grade allows for up to 4 tight or 3 dead pinhole knots per 79" (2m) board length. Unlimited combination of heartwood and sapwood, no face pith allowed. Checks allowed to 1/16" as long as plank stability, weather-resistance, and cosmetics are not adversely affected.

(503) 512-6780 • sales@nakamotoforestry.com

Profiles and Dimensions

(diagrams below are 20% actual size)

1 x 5 x 12 Moulder Blank

- Rough sawn
- 145-11/16" (3700mm) length
- 4.8 SF/piece
- 3.4 BF/piece



8/4 Rough Lumber

- Rough sawn
- 157-1/2" – 169-5/16" (4000 – 4300mm) lengths
- 7-1/2" – 9-7/16"
- (190 – 240mm) widths

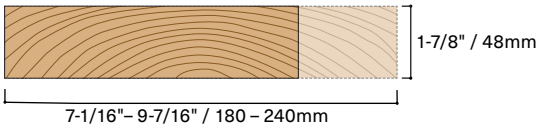

Prefinish

Hinoki's durability and preservability are among the highest levels in the world. Its aesthetic beauty and resiliency make hinoki an excellent choice for interior applications, with or without a finish applied. If coated with a finish, the wood will lose its fragrant qualities.

Prefinish Options

N/A

Prefinish Color

N/A

Pressure-Treated Fire Retardant

Not available

Field Cuts

N/A

Species

Chamaecyparis obtusa, a slow-growing and aromatic Cypress species native to Japan. The Japanese name is "Hinoki"and it is considered a sacred material. In English it is colloquially called Japanese Cypress or Hinoki Cypress.

Installation Details

For installation instructions:

Contact sales@nakamotoforestry.com

Overage

Please add a healthy overage ranging from 15-25%, as shipping additional material can be expensive

Fastening (Interior)

Per design specifications

Substrate (Interior)

Per design specifications

Installation Layout

Per design specifications

Fire Resistance

ASTM E-84 Class B

Moisture Content

Air dried then kiln dried to 9-13% MC, but may fluctuate during transport or warehousing. Please acclimate on site for two weeks prior to installation.

Manufacturer

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

PEFC Certified

This product is from sustainably managed forests and controlled sources

PEFC/29-31-385

www.pefc.org

Fasteners - Painted Black

Use these fasteners for a polished, efficient installation, and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

Coil Nails

Standard coil siding nails painted black

SKU# CNB20

- 6 penny (6d)
- 2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap

SKU# CNB25

- 8 penny (8d)
- 2.5", 2 1/2" length
- 1800 pcs/box
- Each box covers +/- 450 SF of 6" shiplap

SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel shank & coil wire to prevent ferrous streaking
- Shank diameter 0.092"
- Head diameter 0.221"
- Annular-ring shank
- 15° pitch
- Diamond point

COMPATIBLE COIL NAILERS

- Metabo® (Hitachi®) NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Bostitch® N64C, N66C, N75C
- Makita® AN611, AN635H
- Grip-Rite® GRTCS250
- Duo-Fast® P275C • Pallet Pro® 57F

Diagrams below are to size

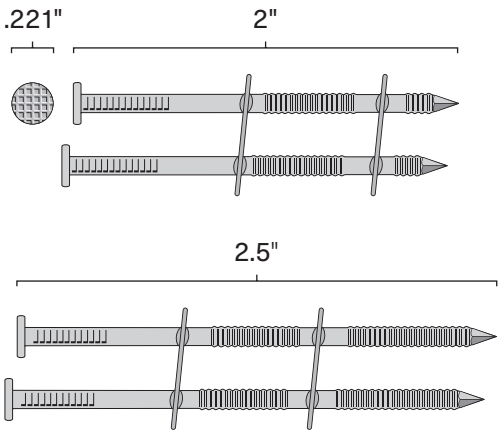

Hand-Drive Nails

Standard 2" ring-shank hand-drive siding nails painted black

SKU# HNB20-05

- 5# box , +/- 975 pcs
- Each box covers +/- 220 SF of 6" shiplap

SKU# HNB20-25

- 25# box , +/- 4,875 pcs
- Each box covers +/- 1,100 SF of 6" shiplap

SPECIFICATIONS

- 6 penny (6d)
- 2" length
- Full round checkered head
- Type 316 stainless steel
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"
- Annular-ring shank
- Diamond point
- 13 gauge



Hammer Caps

To prevent paint scuffing on siding nails

SKU# HMC125

- 2 pcs/pack
- 1 pc covers +/- 200 SF

SPECIFICATIONS

- Impact-resistant plastic
- Fits both 16oz and 20oz hammers



Wakugi Nails

Japanese traditional hand-forged nails

SKU# HNW217

- 100 pcs
- Each box covers +/- 25 SF

SPECIFICATIONS

- 2.17" length
- Carbon steel
- Square shank
- Needle point
- Pre-drilling recommended



Fasteners - Painted Black – Continued

Trim Head Siding Screws

Standard star drive trim head sidingscrews painted black

SKU# SB162
- 1.625”, 1 5/8” length
- 4,000 pcs/box
- Each box covers +/- 1,000 SF of 6” shiplap

SKU# SB225
- 2.25”, 2 1/4” length
- 3,000 pcs/box
- Each box covers +/- 750 SF of 6” shiplap

SKU# SB300
- 3” length
- 2,000 pcs/box
- Each box covers +/- 500 SF of 6” shiplap

SPECIFICATIONS
- #7 screw
- T15 star drive
- Trim-style head is less noticeable
- Type 316 stainless steel
- Head diameter 0.230”, 1/4”
- Coarse threads up approximately 2/3 of shank
- Type 17 point self-tapping

Diagrams below are to size

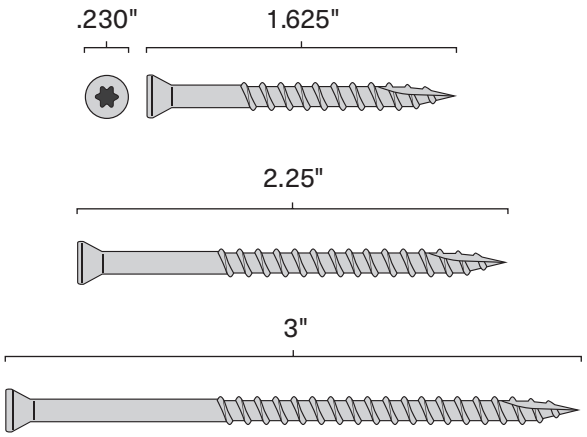

Supplier

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Aluminum Trim Profiles

Use these trims for a polished appearance, efficient installation and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements. Extruded trims are not flashing and are not part of a moisture management system. They have a primarily cosmetic function and will not stop all water intrusion into the structure.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- 6063-T5 0.050+/- 0.005" extruded aluminum from recycled sources
- Diagrams below are 1:2 scale

Low Profile Outside Corner

Black
SKU# LA58B10 *10' length*
SKU# LA58B08 *8' length*

SPECIFICATIONS
- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths



Reveal Open Outside Corner

Black
SKU# RX58B10 *10' length*
SKU# RX58B08 *8' length*

SPECIFICATIONS
- Factory-anodized black
- 5/8" channel
- 8' and 10' lengths



Inside Corner

Black
SKU# IW34B10 *10' length*
SKU# IW34B08 *8' length*

SPECIFICATIONS
- Factory-anodized black
- 7/8" channel
- 8' and 10' length



Horizontal Z-Bar

Black
SKU# Z58B08 *8' length*

SPECIFICATIONS
- Factory-anodized black
- 5/8" transition
- 8' lengths



Standard J-Bar

Black
SKU# J58B10 *10' length*
SKU# J58B08 *8' length*

SPECIFICATIONS
- Factory-anodized black or primed white
- 5/8" channel
- 8' and 10' lengths



Supplier

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Perforated J-Bar

• Diagrams below are 1:2 scale

SPECIFICATIONS

- Intake or exhaust
- Mill finish aluminum
- 1/8" x 7/32" staggered hole pattern
- 0.032 gauge metal stock
- 8' and 10' lengths



3/8"

SKU# PJ38B10 *10' length*
SKU# PJ38B08 *8' length*

- Net free area for air flow 0.51 in^2 per LF



1/2"

SKU# PJ12B10 *10' length*
SKU# PJ12B08 *8' length*

- Net free area for air flow 0.71 in^2 per LF



3/4"

SKU# PJ34B10 *10' length*
SKU# PJ34B08 *8' length*

- Net free area for air flow 1.07 in^2 per LF



Supplier

Nakamoto Forestry North America

Warehouse & Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780