

NAKAMOTO FORESTRY


Siding Accessories

Use these flashings and fasteners for a polished and efficient installation, and to achieve optimal long-term wood siding durability.

Aluminum Flashing Profiles


- 6063-T5 0.050+/- 0.005" extruded aluminum
- See profile diagram for specific dimensions
- Diagrams below not to scale

Low Profile Outside Corner




- SKU# NMBLK58 (Black)**
SKU# NMPRM58 (Primed White)
- Low profile outside corner
 - Factory-anodized or primed
 - 5/8" channel
 - 10 foot lengths

Reveal Open Outside Corner




- SKU# NMBLCR58**
- Reveal open outside corner
 - Factory-anodized black
 - 5/8" channel
 - 10 foot lengths

Inside Corner




- SKU# NMBLINS34**
- Inside corner
 - Factory-anodized black
 - 10 foot lengths

Horizontal Z-Bar




- SKU# NMBLZ58**
- Horizontal Z-bar
 - Factory-anodized black
 - 5/8" transition
 - 8 foot lengths

J-Bar




- SKU# NMBLJ58**
- Standard J-bar
 - Factory-anodized black
 - 5/8" channel
 - 10 foot lengths

Perforated J-Bar Rain Screen

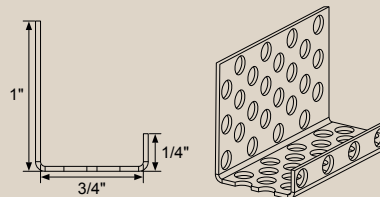

- SKU# NMALSCR34**
- Perforated rain screen J-bar for 3/4" thick furring
 - Intake or exhaust
 - Mill finish aluminum
 - 1/8" x 7/32" staggered hole pattern
 - 0.032 gauge metal stock
 - Net free area for air flow (per 10'L) = 10.7 SF
 - 10 foot lengths

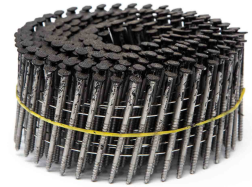

Coil Nails

- SKU# NMSS200**
 Standard 2" ring-shank coil siding nails painted black

SPECIFICATIONS

- 1800 pcs/box (covers +/- 450 SF of 6" shiplap)
- 6 penny (6d)
- 2" length
- 15 degree pitch
- Type 316 Stainless Steel
- Annular-Ring Shank
- Full Round Checkered Head
- Diamond Point
- 13 gauge
- Head diameter 0.221"
- Shank diameter 0.092"

COMPATIBLE COIL NAILERS

- Hitachi® NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Makita® AN611, AN635H
- Pallet Pro® 57F
- Bostitch® N64C, N66C, N75C
- Duo-Fast® P275C
- Grip-Rite® GRTCS250



Hand-drive Nails

- SKU# NMHD200**
 Standard 2" ring-shank hand-drive siding nail painted black

SPECIFICATIONS

- +/- 975 pcs/box (covers +/- 220 SF of 6" shiplap)
- 6 penny (6d)
- 2" length
- Type 316 Stainless Steel
- Annular-Ring Shank
- Full Round Checkered Head
- Diamond Point
- 13 Gauge
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"

Supplier

- Nakamoto Forestry North America**
 Warehouse and Office (By Appt Only)
 6400 SE 101st Ave Unit 2C
 Portland Oregon 97266
 Tel. (503) 512-6780
- Mailing and Billing
 4110 SE Hawthorne Blvd. #190
 Portland Oregon 97214
 Tel. (503) 512-6780

