



Fastenings - Painted Black

Use these fastenings for a polished, efficient installation, and to achieve optimal durability. Nakamoto Forestry does not require the purchase of accessories as part of a lumber package. However, accessories used must meet our installation parameters and local code. Always follow manufacturer installation requirements.

Exteriors must be properly sealed and flashed in a shingle fashion to prevent moisture intrusion and buildup. Always have a design professional review project installation parameters relative to your local building code and regional best practices for managing moisture and water vapor in your area.

- Diagrams below are to size

Coil Nails

Standard coil siding nails painted black

SKU# CNB20

- 6 penny (6d)
- 2" length
- 1800 pcs/box (covers +/- 450 SF of 6" shiplap)

SKU# CNB25



- 8 penny (8d)
- 2.5", 2 1/2" length
- 1800 pcs/box (covers +/- 450 SF of 6" shiplap)

SPECIFICATIONS

- Full round checkered head
- Type 316 Stainless Steel shank & coil wire to prevent ferrous streaking
- Shank diameter 0.092"
- Head diameter 0.221"
- Annular-ring shank
- 15° pitch
- Diamond point
- 13 gauge

COMPATIBLE COIL NAILERS

- Hitachi® NV65AH, NV75AG
- Max® CN55, CN665, CN565, CN565S, CN550S
- Senco® SCN60XP, SCN49, SCN65XP
- Bostitch® N64C, N66C, N75C
- Makita® AN611, AN635H
- Grip-Rite® GRTCS250
- Duo-Fast® P275C
- Pallet Pro® 57F

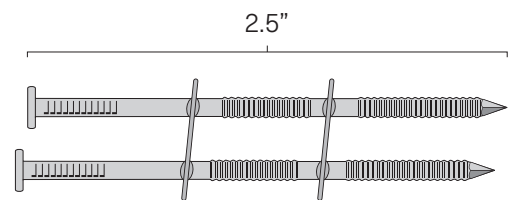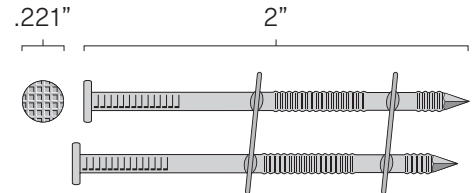

Hand-drive Nails


Standard 2" ring-shank hand-drive siding nails painted black

SKU# HNB20

- 6 penny (6d)
- 2" length
- 5# box, +/- 975 pcs (covers +/- 220 SF of 6" shiplap)

SPECIFICATIONS

- Full round checkered head
- Type 316 stainless steel
- Head diameter 0.219", 1/4"
- Shank diameter 0.099"
- Annular-ring shank
- Diamond Point
- 13 gauge

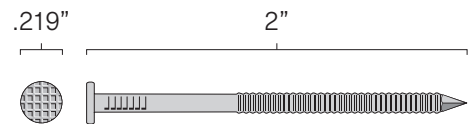

Trim Head Siding Screws

Standard square drive trim head siding screws painted black

SKU# SB162



- 1.625", 1 5/8" length
- 4,000 pcs/box (covers +/- 1000 SF of 6" shiplap)

SKU# SB225

- 2.25", 2 1/4" length
- 3,000 pcs/box (covers +/- 750 SF of 6" shiplap)

SPECIFICATIONS

- #7 screw
- #1 square drive
- Trim-style head is less noticeable
- Type 316 stainless steel
- Head diameter 0.230", 1/4"
- Coarse threads up approximately 2/3 of shank
- Type 17 point self-tapping

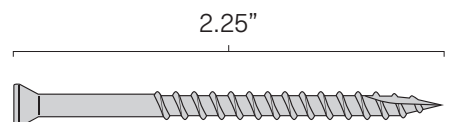

Supplier

Nakamoto Forestry North America

Warehouse and Office (By Appt Only)
7320 NE 55th Ave.
Portland Oregon 97218
Tel. (503) 512-6780

Mailing and Billing
4110 SE Hawthorne Blvd. #190
Portland Oregon 97214

